

Service Manual

Compact Disc Player


Compact Disc Player

SL-PS670A



Colour

(K) : Black

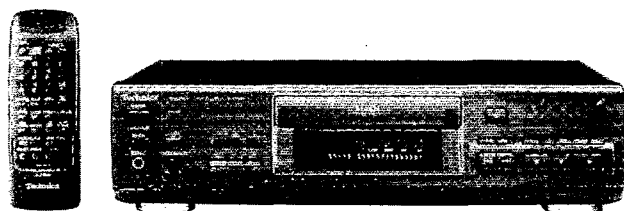

Areas

Suffix for Model No.	Area	Colour
(E)	Europe	(K)
(EB)	Britain	
(EG)	Germany and Italy	

RAE1100Z MECHANISM SERIES

Specifications

■ Audio

No. of channels	2 (left and right, stereo)
Frequency response	2 – 20,000 Hz, ± 0.5 dB
Output voltage	2 V (at 0 dB)
Dynamic range	98 dB
S/N	107 dB
Harmonic distortion	0.002% (1 kHz, 0 dB)
Total harmonic distortion	0.0027% (1 kHz, 0 dB)
Wow and flutter	Below measurable limit
DA converter	MASH (1 bit)
Output impedance	600 Ω
Load impedance	More than 10 k Ω
Headphone output level	15 mW max. 32 Ω (adjustable)

■ Pickup

Wavelength	780 nm
Laser Power	No hazardous radiation is emitted (with safety protection)

■ General

Power consumption	15 W
Power supply	AC 50/60 Hz, 230 – 240 V
Dimensions (W $\times$ H $\times$ D)	430 $\times$ 114 $\times$ 290 mm
Weight	4.0 kg

Note:

Specifications are subject to change without notice.
Weight and dimensions are approximate.

For United Kingdom only:

This apparatus was produced to BS 800.

*

• MASH is a trademark of NTT.

⚠ WARNING

This service information is designed for experienced repair technicians only and is designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics®

© 1994 Matsushita Electric Industrial Co., Ltd.
All rights reserved. Unauthorized copying
and distribution is a violation of law.

Contents

	Page		Page
● Handling Precautions for Traverse Deck	2	● Schematic Diagram	16~22
● Precaution of Laser Diode	2, 3	● Printed Circuit Board Diagram	23~25
● Accessories	3	● Wiring Connection Diagram	26
● Connections	3	● Troubleshooting Guide	27, 28
● Caution for AC Mains Lead	4	● Automatic Adjustment Results Display Function	29
● Location of Controls	5	● Function of IC Terminals	30~33
● Basic Operating Procedure	6	● Replacement Parts List	34~41
● Operation Check and		● Cabinet Parts Location	38, 39
Main Component Replacement Procedures	7~13	● Loading Unit Parts Location	40
● Block Diagram	14, 15		

Handling Precautions for Traverse Deck

The laser diode in the traverse deck (optical pickup) may break down due to potential difference caused by static electricity of clothes or human body. So, be careful of electrostatic breakdown during repair of the traverse deck (optical pickup).

● Handling of traverse deck (optical pickup)


1. Do not subject the traverse deck (optical pickup) to static electricity as it is extremely sensitive to electrical shock.
2. To prevent the breakdown of the laser diode, an anti-static shorting pin is inserted into the flexible board (FPC board).
When removing or connecting the short pin, finish the job in as short time as possible.
3. Take care not to apply excessive stress to the flexible board (FPC board).
4. Do not turn the variable resistor (laser power adjustment). It has already been adjusted.

● Grounding for electrostatic breakdown prevention

1. Human body grounding
Use the anti-static wrist strap to discharge the static electricity from your body.
2. Work table grounding
Put a conductive material (sheet) or steel sheet on the area where the traverse deck (optical pickup) is placed, and ground the sheet.

Caution:

The static electricity of your clothes will not be grounded through the wrist strap. So, take care not to let your clothes touch the traverse deck (optical pickup).

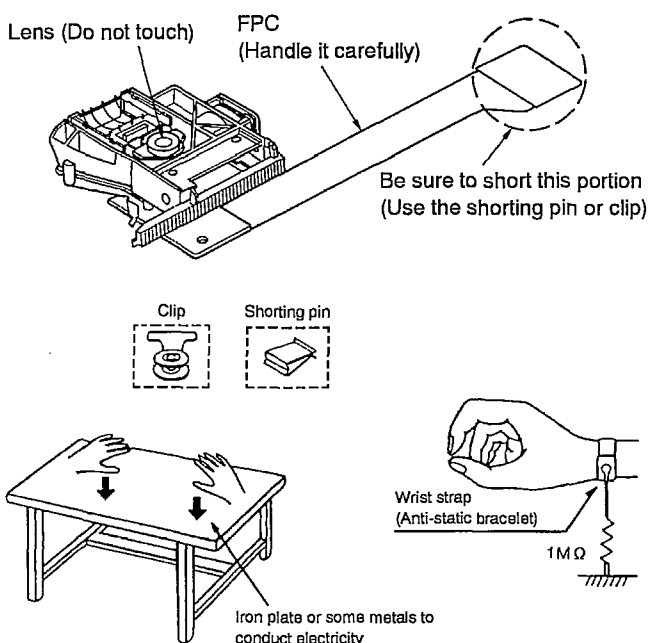

Precaution of Laser Diode

CAUTION: This product utilizes a laser diode with the unit turned "on", invisible laser radiation is emitted from the pick up lens.
Wave length: 780 nm
Maximum output radiation power from pick up: 100 μ W/VDE



Laser radiation from the pick up unit is safety level, but be sure the followings:

1. Do not disassemble the pick up unit, since radiation from exposed laser diode is dangerous.
2. Do not adjust the variable resistor on the pick up unit. It was already adjusted.
3. Do not look at the focus lens using optical instruments.
4. Recommend not to look at pick up lens for a long time.


ACHTUNG: Dieses Produkt enthält eine Laserdiode. Im eingeschalteten Zustand wird unsichtbare Laserstrahlung von der Lasereinheit abgestrahlt.
Wellenlänge: 780 nm
Maximale Strahlungsleistung der Lasereinheit: 100 μ W/VDE

Die Strahlung an der Lasereinheit ist ungefährlich, wenn folgende Punkte beachtet werden:

1. Die Lasereinheit nicht zerlegen, da die Strahlung an der freigelegten Laserdiode gefährlich ist.
2. Den werkseitig justierten Einstellregler der Lasereinheit nicht verstellen.
3. Nicht mit optischen Instrumenten in die Fokussierlinse blicken.
4. Nicht über längere Zeit in die Fokussierlinse blicken.

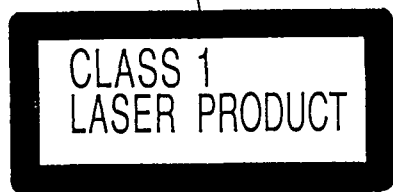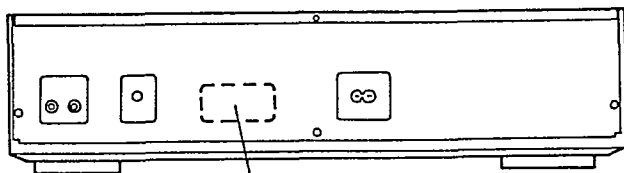


LUOKAN 1 LASERLAITE
KLASS 1 LASER APPARAT

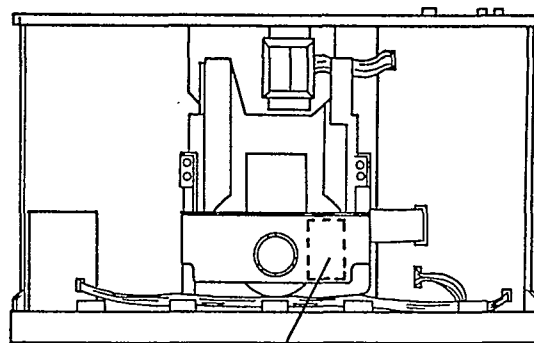

DANGER	INVISIBLE LASER RADIATION WHEN OPEN. AVOID DIRECT EXPOSURE TO BEAM.
ADVARSEL	USYMLIG LASERSTRÅLING VED ÅBNING, NÅR SIKKERHEDSAFBRYDEDE ER UDE AF FUNKTION. UNDGÅ UDSÆTTELSE FOR STRÅLING.
VARO!	AVATTAASSA JA SUOJALUKITUS OHITETTAESSA OLET ALTILTIINA NÄKYMÄTÖN LASERSÄTELYLLE. ÄLÄ KATSO SÄTEESIEN.
VARNING	OSYMLIG LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD OCH SPÄRREN ÄR UTKOPPLAD. BETRÄKTA EJ STRÅLEN.
ADVERSEL	USYMLIG LASERSTRÅLING NÄR DEKSEL ÅPNES OG SIKKERHEDSLÅS BRÆYES. UNDGÅ EKSPONERING FOR STRÅLEN.
VORSICHT	UNSIICHTBARE LASERSTRÄHLUNG, WENN ABDECKUNG GEÖFFNET. NICHT DEM STRAHL AUSSETZEN. ROLLSCHUTZ!

Accessories


AC mains lead..... 1 pc.
(For United Kingdom: RJA0044-C) (For others: RJA0043-C)




Remote control..... 1 pc.
(EUR642101)




Stereo connection cable..... 1 pc.
(SJP2276)




Battery for remote control 2 pcs.
(UM-4, AAA, R03)



Connections

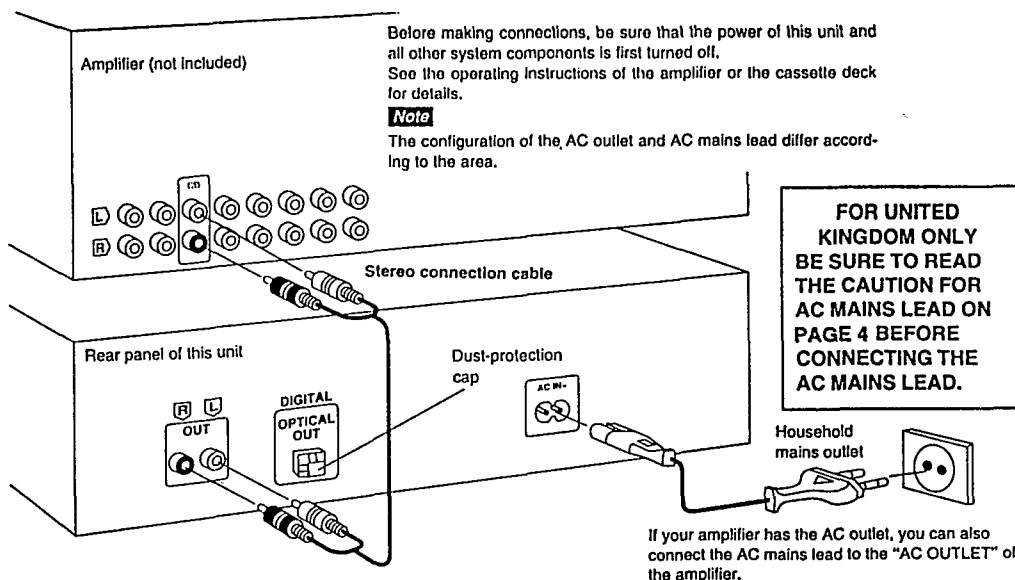

To connect the digital amplifier

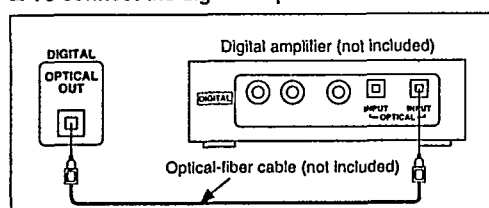

Note

Remove a dust-protection cap which is inserted in DIGITAL OPTICAL OUT terminal only when you connect to the digital amplifier. When this terminal is not being used, attach the cap as shown in the illustration above.

■Caution for AC Mains Lead (For United Kingdom)

(“EB” area code model only)

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.

A 5-ampere fuse is fitted in this plug.

Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362.

Check for the ASTA mark  or the BSI mark  on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.

If you lose the fuse cover the plug must not be used until a replacement cover is obtained.

A replacement fuse cover can be purchased from your local dealer.

CAUTION!

IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OF SAFELY.

THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted please observe the wiring code as shown below.

If in any doubt please consult a qualified electrician.

IMPORTANT

If the socket outlets in the home are not suitable for the plug supplied with this appliance it should be cut off and an appropriate three pin plug fitted.

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral

Brown: Live


Do not connect either wire to the earth terminal in the plug which is marked by the letter “E” or by the safety earth symbol  or coloured green or green-and-yellow.

As the colours of the wires in the mains lead of this apparatus may not correspond with the coloured markings identifying the terminals in your plug proceed as follows. The wire which is coloured BLUE must be connected to the terminal which is marked with the letter N or coloured BLACK.

The wire which is coloured BROWN must be connected to the terminal which is marked with the letter L or coloured RED.


Before use

Remove the connector cover as follows.

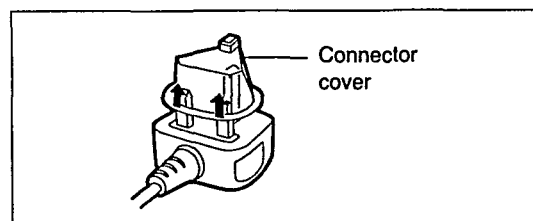


How to replace the fuse


1. Open the fuse cover with a screwdriver.

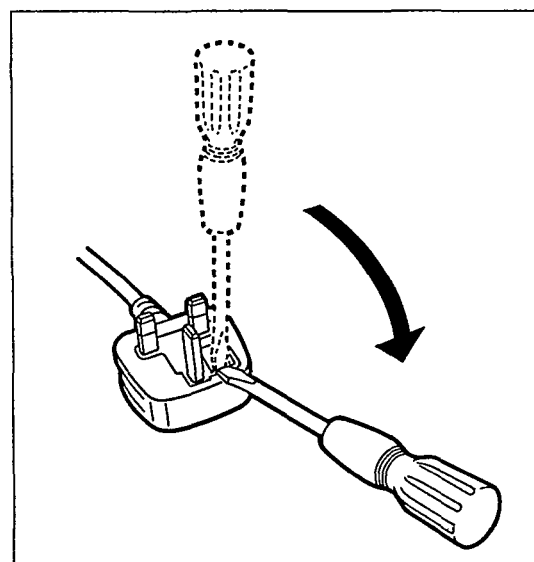

2. Replace the fuse and close or attach the fuse cover.

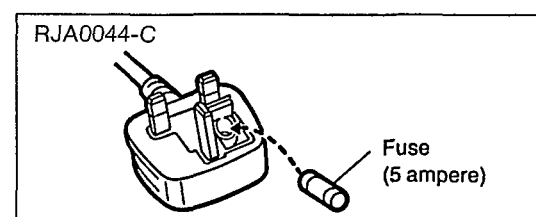



■ Location of Controls

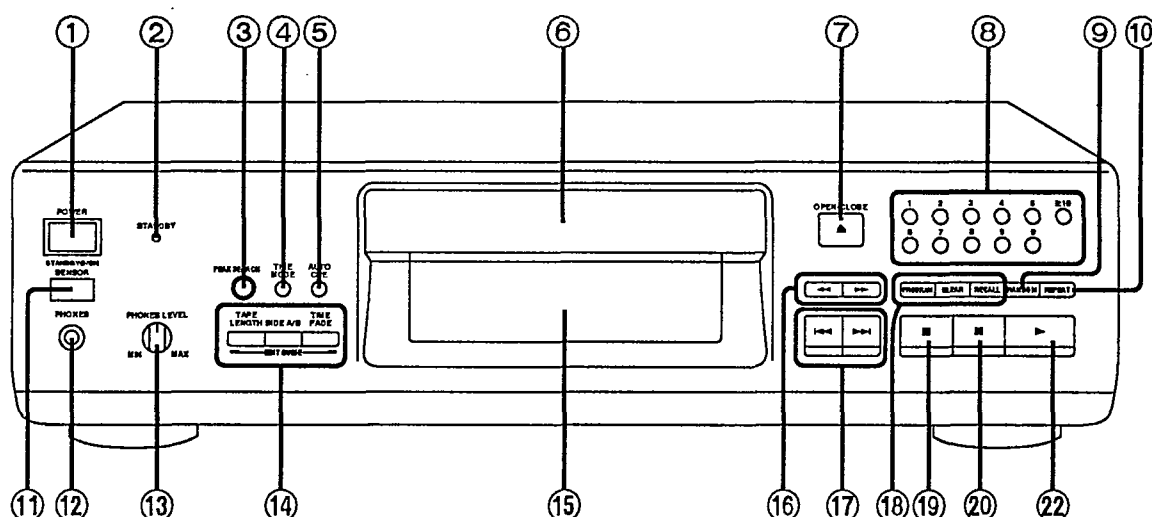

No.	Name
①	Power “STANDBY $\odot$/ON” switch (POWER, STANDBY $\odot$/ON) Press to switch the unit from on to standby mode or vice versa. In standby mode, the unit is still consuming a small amount of power.
②	Standby indicator (STANDBY) When the unit is connected to the AC mains supply, this indicator lights up in standby mode and goes out when the unit is turned on.
③	Peak search button (PEAK SEARCH)
④	Time mode select button (TIME MODE)
⑤	Auto cue button (AUTO CUE)
⑥	Disc tray
⑦	Disc tray open/close button ($\blacktriangle$ OPEN/CLOSE)
⑧	Numeric buttons (1–9, 0, ≥ 10)
⑨	Random play button (RANDOM)
⑩	Repeat button (REPEAT)
⑪	Remote control signal sensor (SENSOR)
⑫	Headphones jack (PHONES) (ϕ 6.3, 32 Ω)
⑬	Headphones volume level knob (PHONES LEVEL)


No.	Name
⑭	CD edit record buttons (EDIT GUIDE) •Tape length button (TAPE LENGTH) •Tape side select button (SIDE A/B) •Time fade button (TIME FADE)
⑮	Display panel
⑯	Search buttons ($\blacktriangleleft\blacktriangleright$)
⑰	Skip buttons ($\blacktriangleleft\blacktriangleright$)
⑱	Program play buttons •Program button (PROGRAM) •Clear button (CLEAR) •Recall button (RECALL)
⑲	Stop button ($\blacksquare$)
⑳	Pause button ($\blacksquare\blacksquare$)
㉔	Play button ($\blacktriangleright$)

Basic Operating Procedure

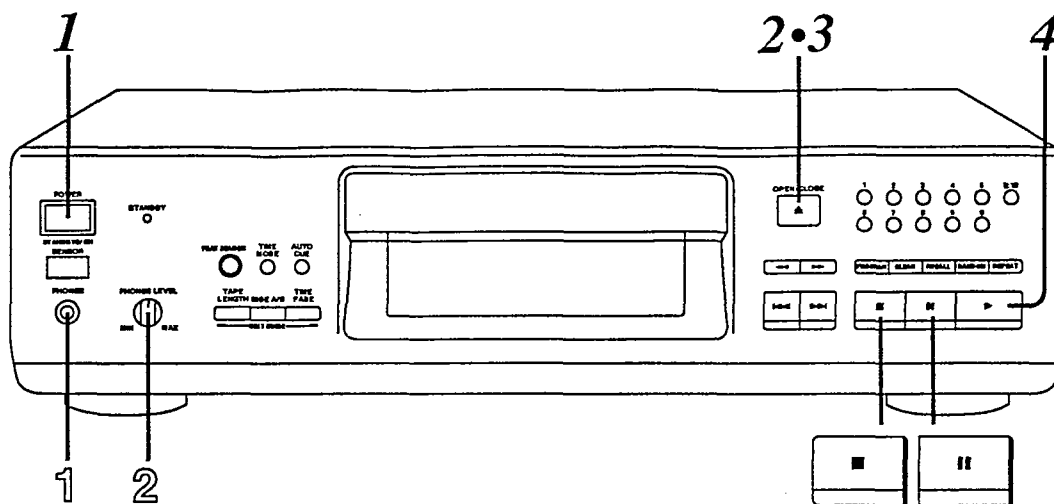


1 Press **POWER** (Power goes on).


- This indicates that a CD has not been installed.
- If a CD is already in the disc tray, it automatically begins playing from the first track.



2 Press **▲ OPEN/CLOSE** to open the tray and insert a disc.



Label must face upward.




3 Press **▲ OPEN/CLOSE** to close the tray.

Total number of tracks Total playing time



Displayed if there are 21 or more tracks on the disc

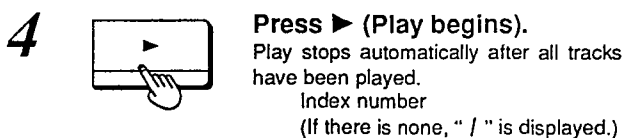

4 Press **▶ (Play begins)**.
Play stops automatically after all tracks have been played.
Index number
(If there is none, " / " is displayed.)

Track currently playing Elapsed time




Illuminates.

To stop the disc play:
Press **■**.



To temporarily stop the disc play:
Press **||**.



Illuminates.

To continue playback, press **▶**.

Notes

- The displayed total playing time includes the time between tracks. For this reason, the time may be several seconds longer than that which appears on song cards and the like.
- When you use the timer with other unit, be sure to turn this unit on.

For your reference:

- If you skip step 3 and press **▶**, the tray automatically closes and play begins from the first track.

To listen with headphones

1 Connect headphones (not included).

PHONES



- Lower the volume before connecting.
- Plug type: Large stereo type

2 Adjust the volume with the **PHONES LEVEL**.

PHONES LEVEL



To make louder: Turn toward the right.
To make lower: Turn toward the left.

Note

Avoid listening for prolonged periods of time to prevent hearing damage.

■ Operation Check and Main Component Replacement Procedures

Warning: This product uses a laser diode. Refer to caution statements on page 2.

ACHTUNG: Die Lasereinheit nicht zerlegen.

Die Lasereinheit darf nur gegen eine vom Hersteller spezifizierte Einheit ausgetauscht werden.

"ATTENTION SERVICER" Some chassis components may have sharp edges. Be careful when disassembling and servicing.

NOTE


1. This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.
2. For reassembly after operation checks or replacement, reverse the respective procedures. Special reassembly procedures are described only when required.
3. Select items from the following index when checks or replacement are required.
4. Illustrated screws are equivalent to actual size.
5. Refer the parts No. on the page of "Main Component Replacement Procedures", if necessary.


● Contents

	Page
● Checking Procedure for each P.C.B.	
1. Checking for the main P.C.B., operation P.C.B. and headphones jack P.C.B.	7
2. Checking for the servo P.C.B.	9
● Main Component Replacement Procedures	
1. Replacement for the traverse unit ass'y	10
2. Replacement for the loading belt and loading motor	13


■ Checking Procedure for each P.C.B.

1. Checking for the main P.C.B., operation P.C.B. and headphones jack P.C.B.

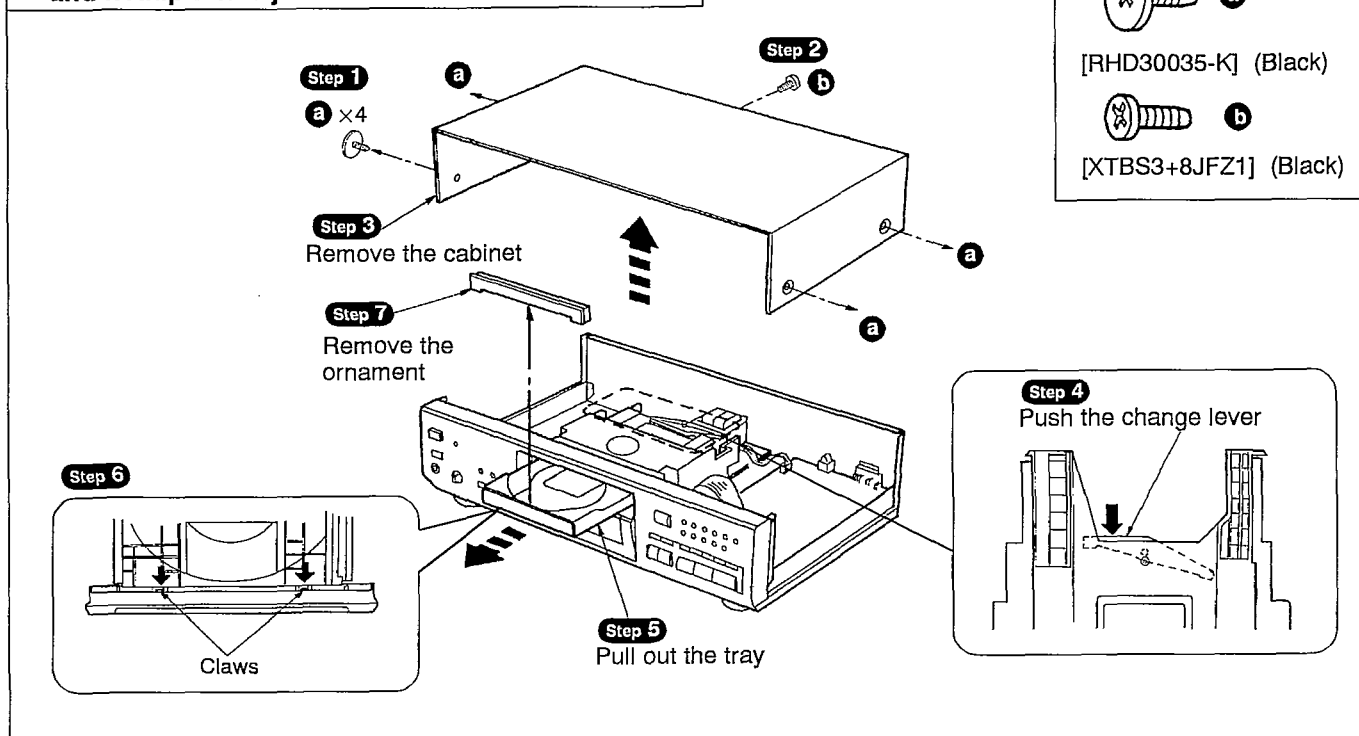

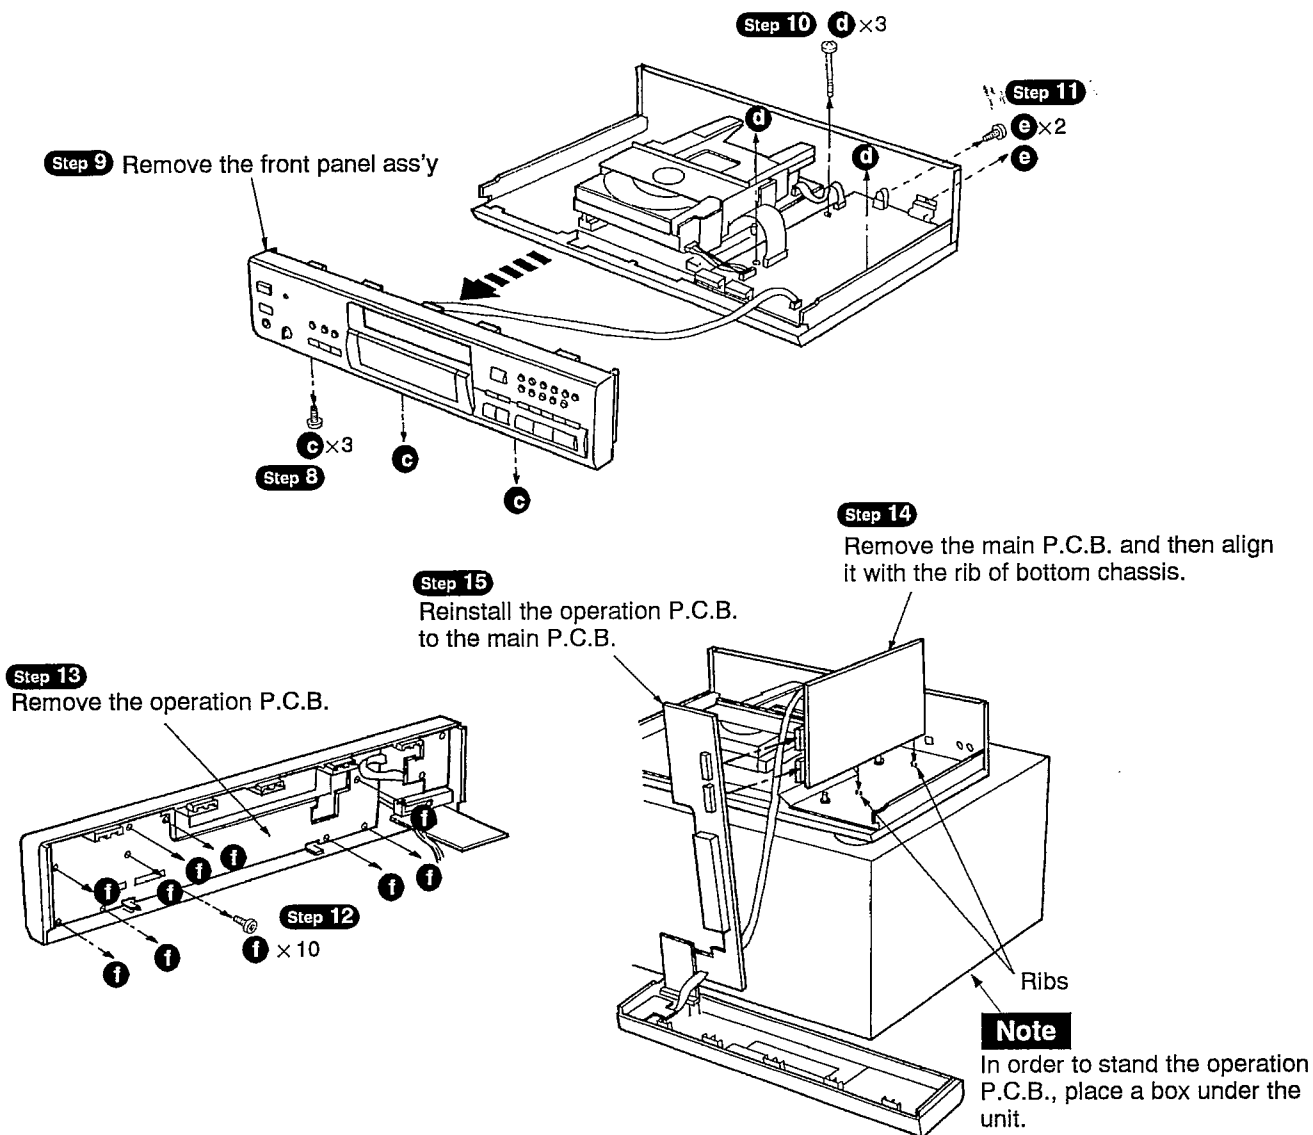


- Check the main P.C.B., operation P.C.B. and headphones jack P.C.B. as shown below.

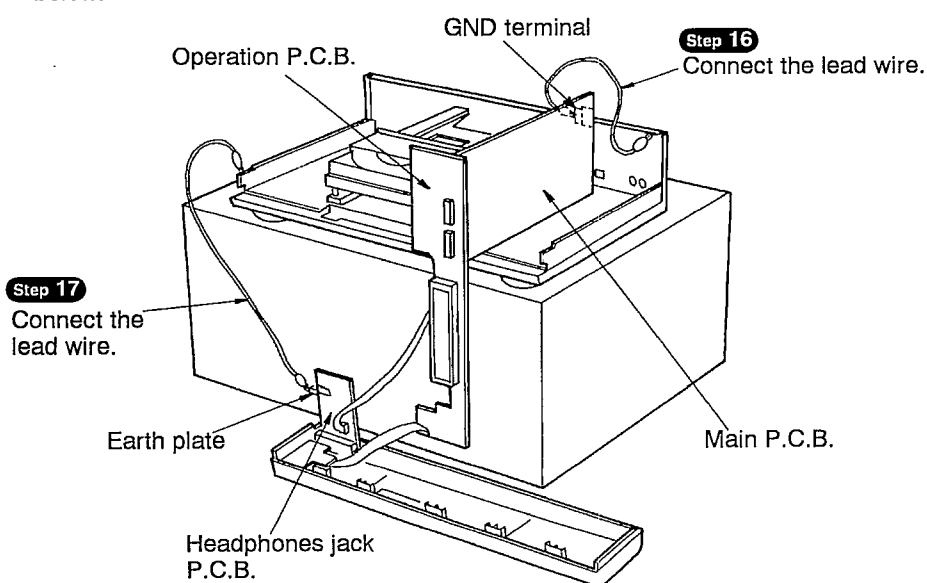


	c
[XTB3+10JFZ] (Black)	
	d
[XTB3+20JFZ] (Black)	
	e
[XTBS3+8JFZ1] (Black)	
	f
[RHD26021]	

2. Checking for the servo P.C.B.

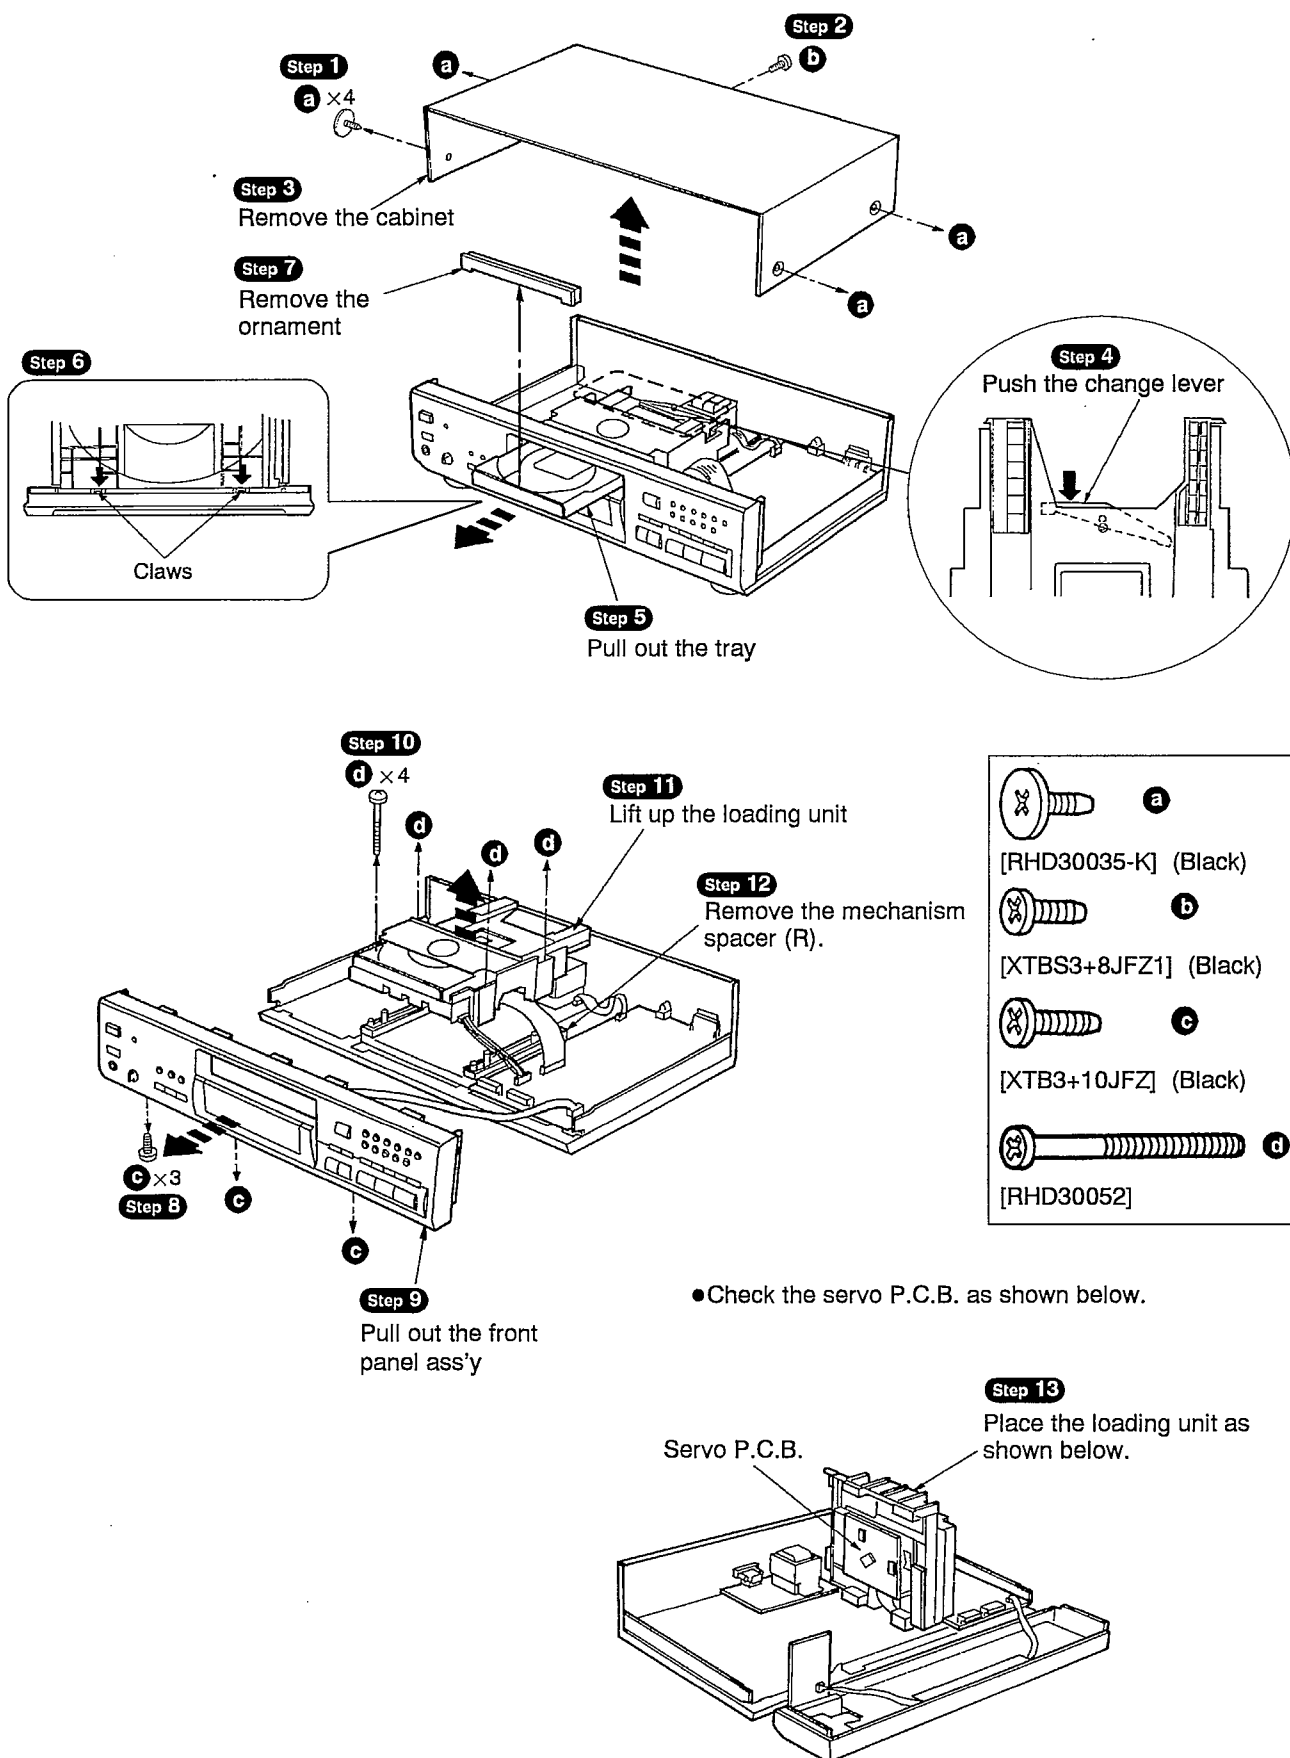

● Check the servo P.C.B. as shown below.

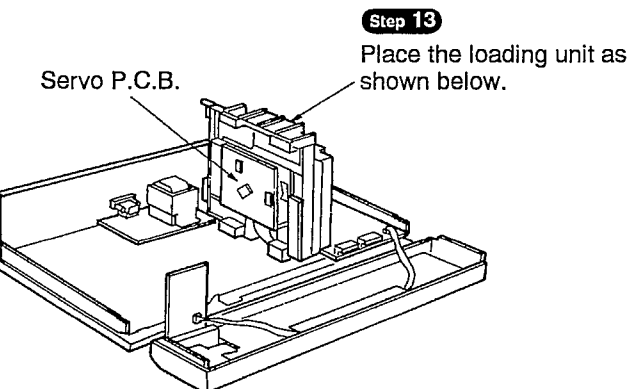

■ Main Component Replacement Procedures

1. Replacement for the traverse unit ass'y

- Follow the **Step 1** ~ **Step 11** of item 2 in checking procedure for each P.C.B. on page 9.

**a**


[XTB3+8JFZ] (Black)

**b**


[XTBS26+8J]

Step 2**a** × 2**Step 3**

Remove the clamp base ass'y.

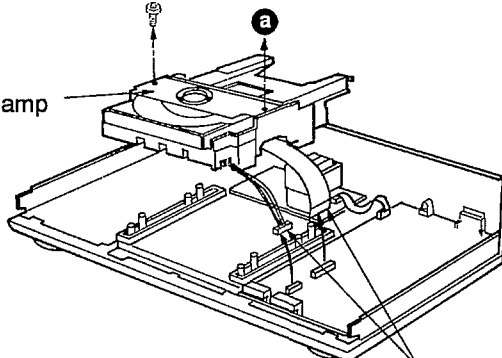
**Step 1**

Remove the connector and FPC.

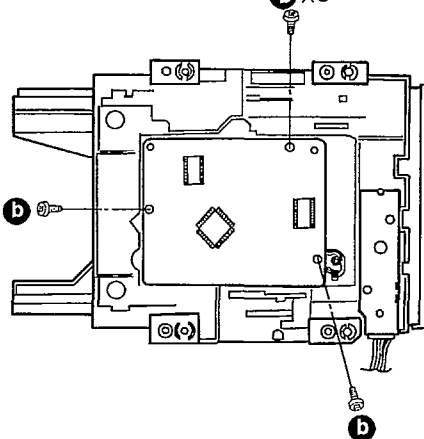Step 4**b** × 3

■ Removal of the flexible cable

- Push the top of the connector in the direction of arrow ①, and then pull out the flexible cable in the direction of arrow ②.

**Step 7**


Remove the servo P.C.B.

Step 5

Remove the connector (CN703).


Step 6

Remove the flexible cable from connector (CN701).

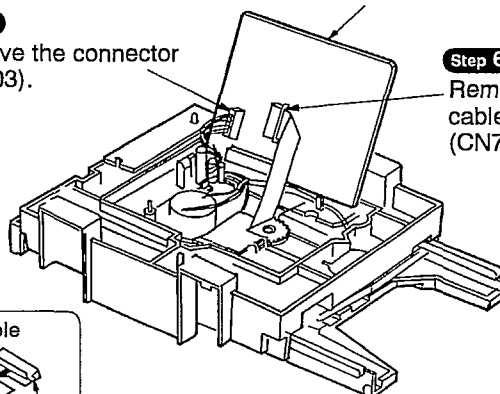


Note


Insert a shorting pin into the traverse unit flexible cable. (Refer to Handling Precautions for Traverse Deck on page 2.)

**Step 8**

Push the change lever

**Step 9**


Push the disc tray.

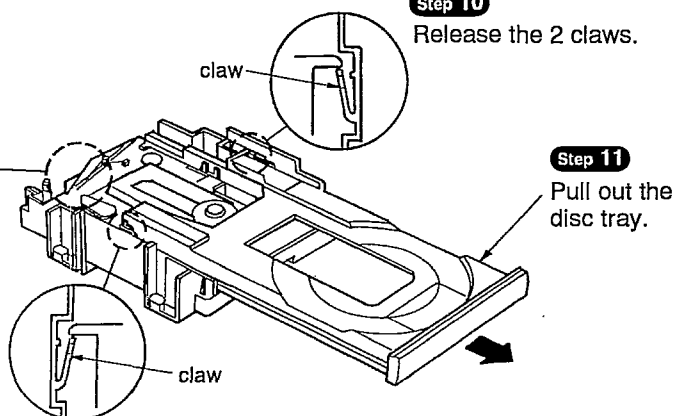**Step 10**

Release the 2 claws.

Step 11

Pull out the disc tray.

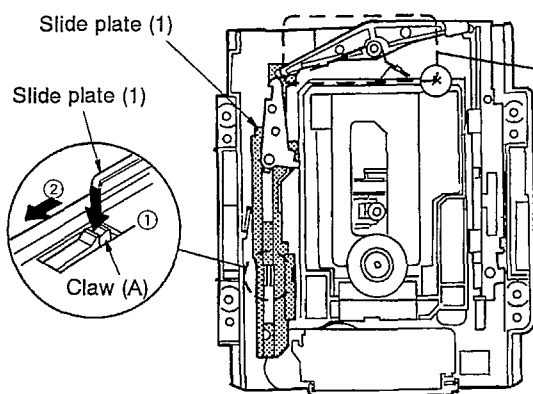


Step 12
Remove the spring.

Step 13


Push the claw (A) in the direction of arrow ①, and then move the slide plate (1) in the direction of arrow ②.

Note

Be careful not to damage the claw (A) because the claw (A) is breakable.

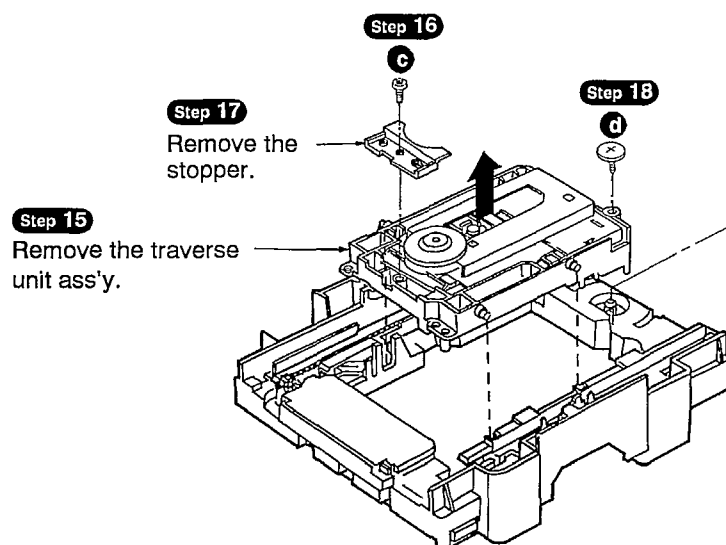


Step 14
Remove the change lever.





Step 20

Remove the damping rubber from traverse chassis.





Step 19


Remove the lead wire from clamber.

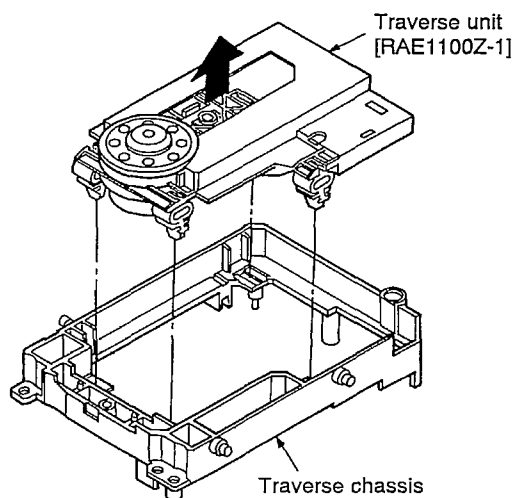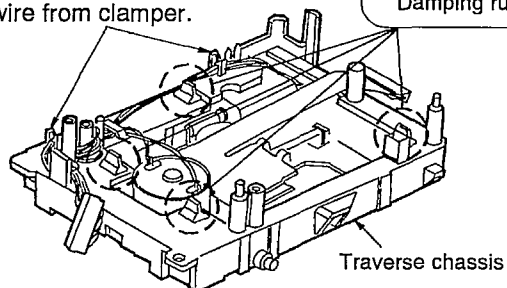

Installation of the disc tray after replacement

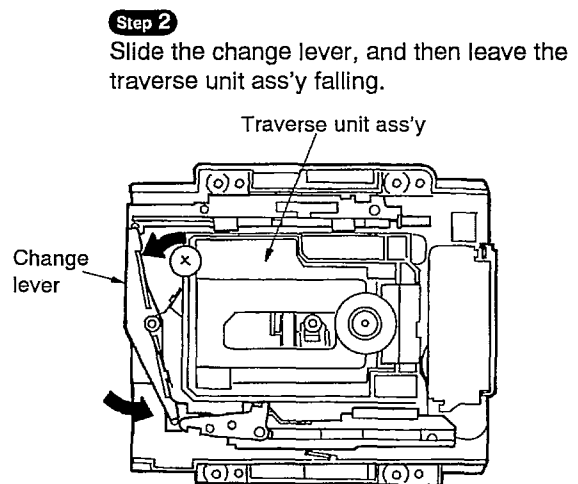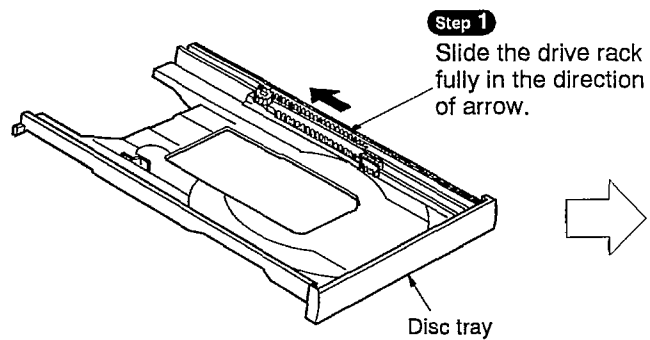


Step 3
Align the disc tray groove with the mechanism chassis rib.

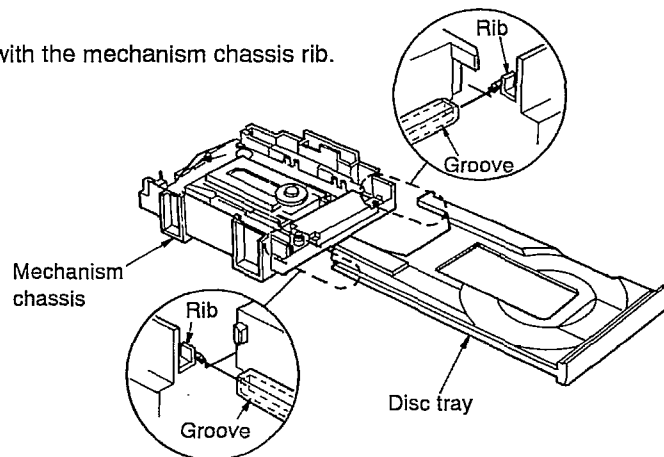


Step 4
Slide the disc tray in the direction of arrow. Then, put the drive rack manually so that the drive gear (1) engages with the drive rack gear.

Step 5
After the drive gear (1) engaged with the drive rack gear, slide the disc tray.

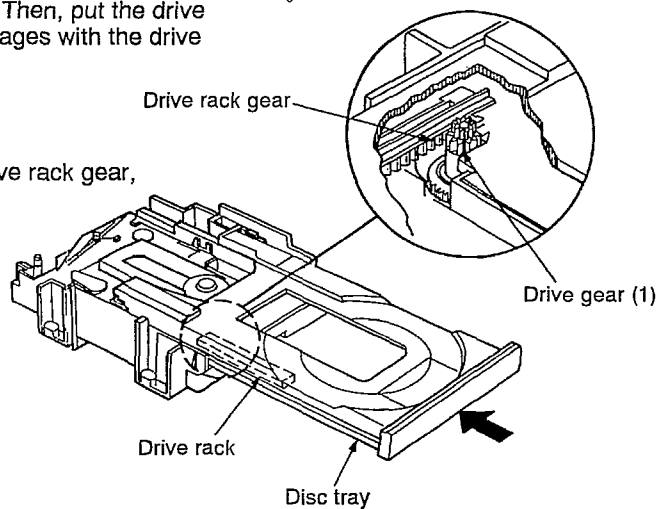


2. Replacement for the loading belt and loading motor

- Follow the **Step 1 – Step 11** of item 2 in checking procedure for each P.C.B. on page 9.
- Follow the **Step 1 – Step 7** of item 1 in main component replacement procedures on page 10.

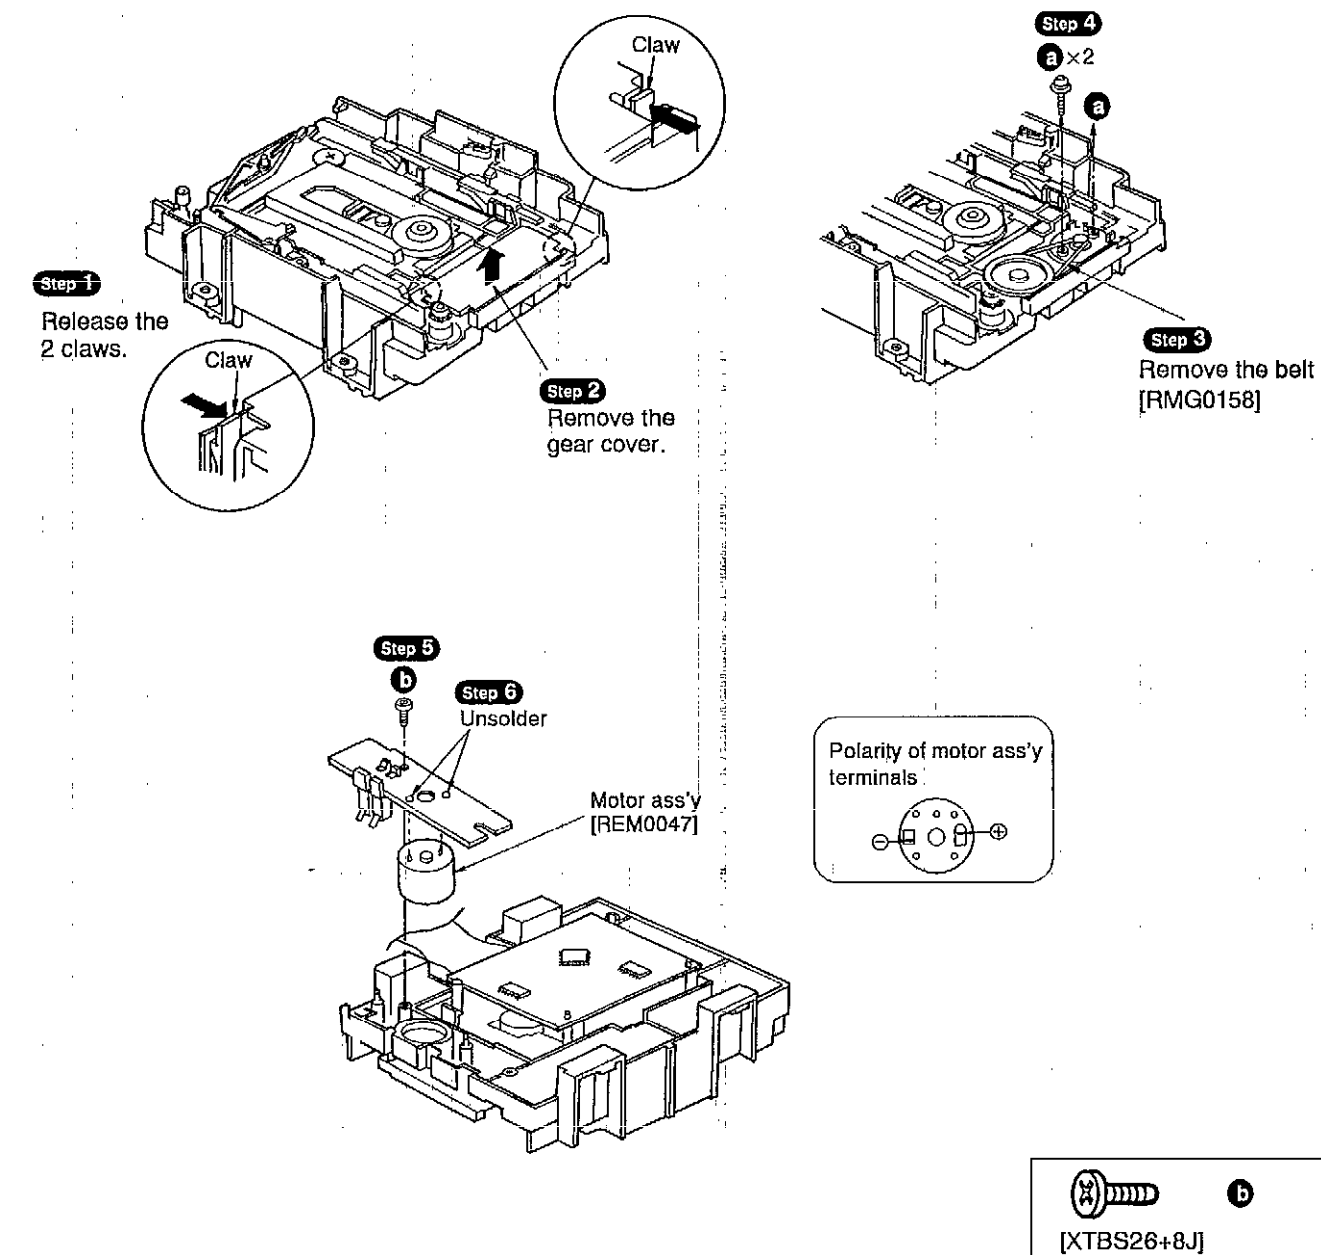


■ Block Diagram

Note: ~~→~~ AUDIO SIGNAL

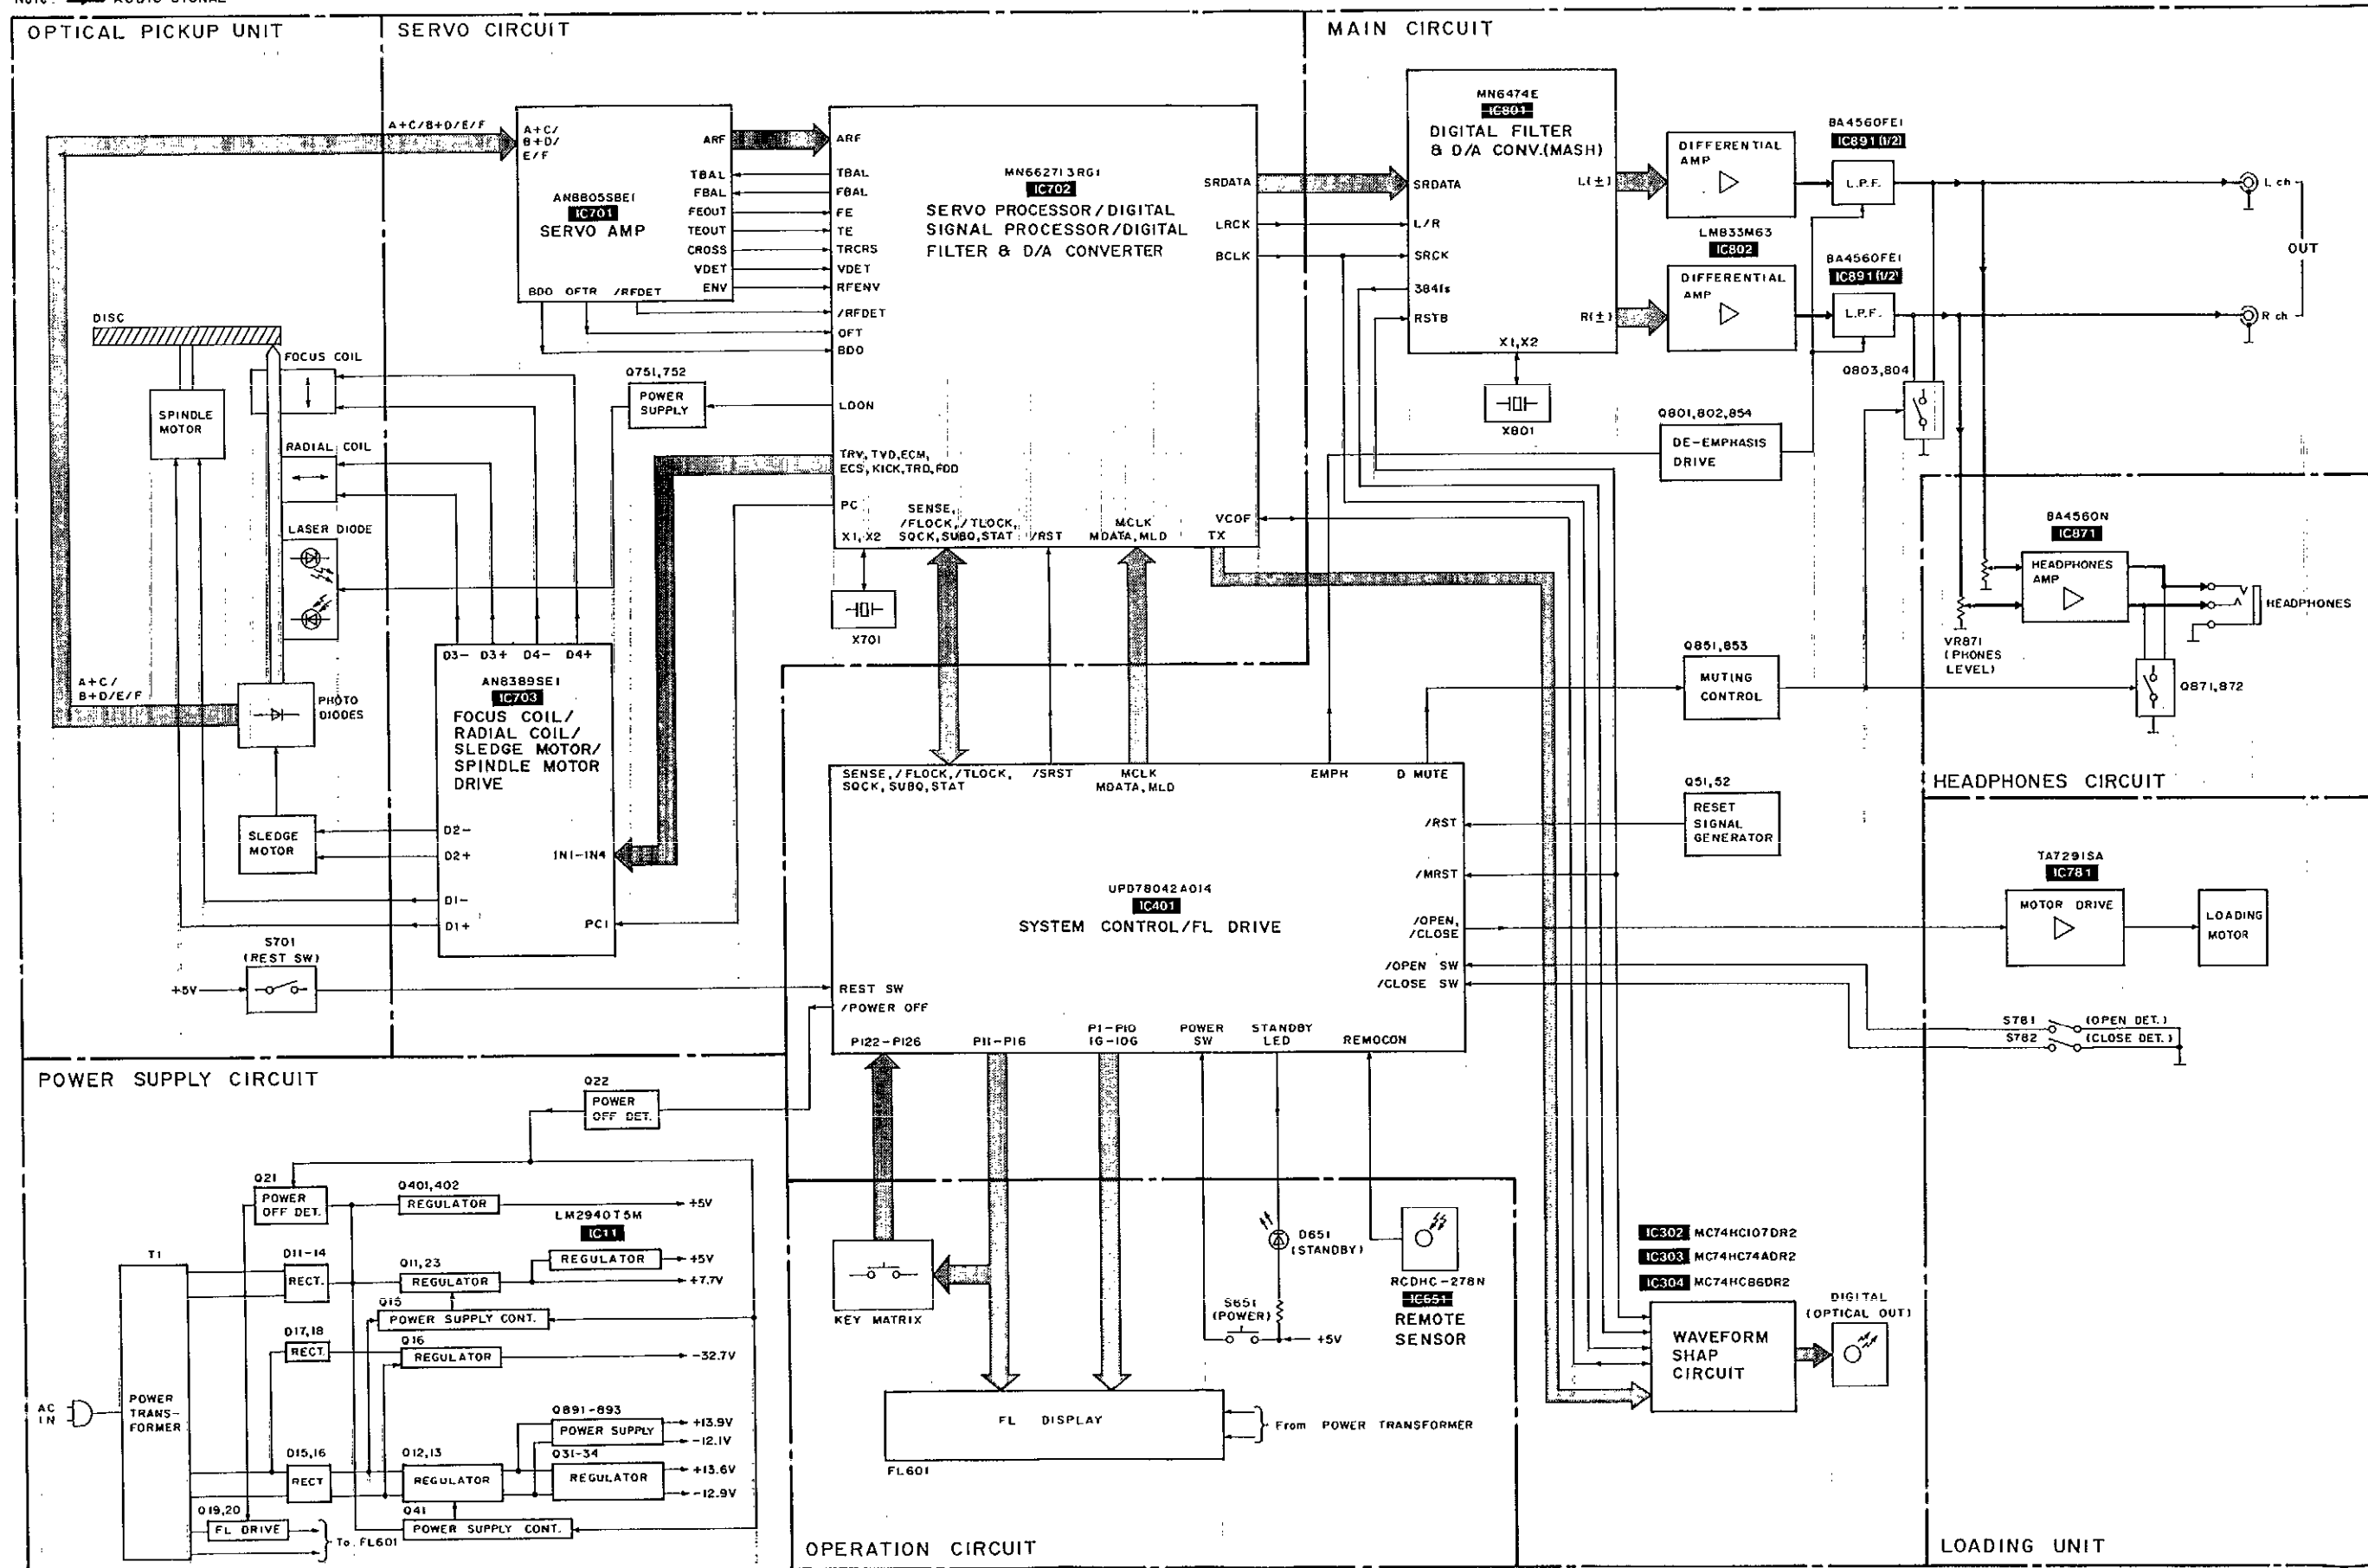




■ Schematic Diagram • Optical Pickup/Servo circuit (Parts list on Pages 34~37)

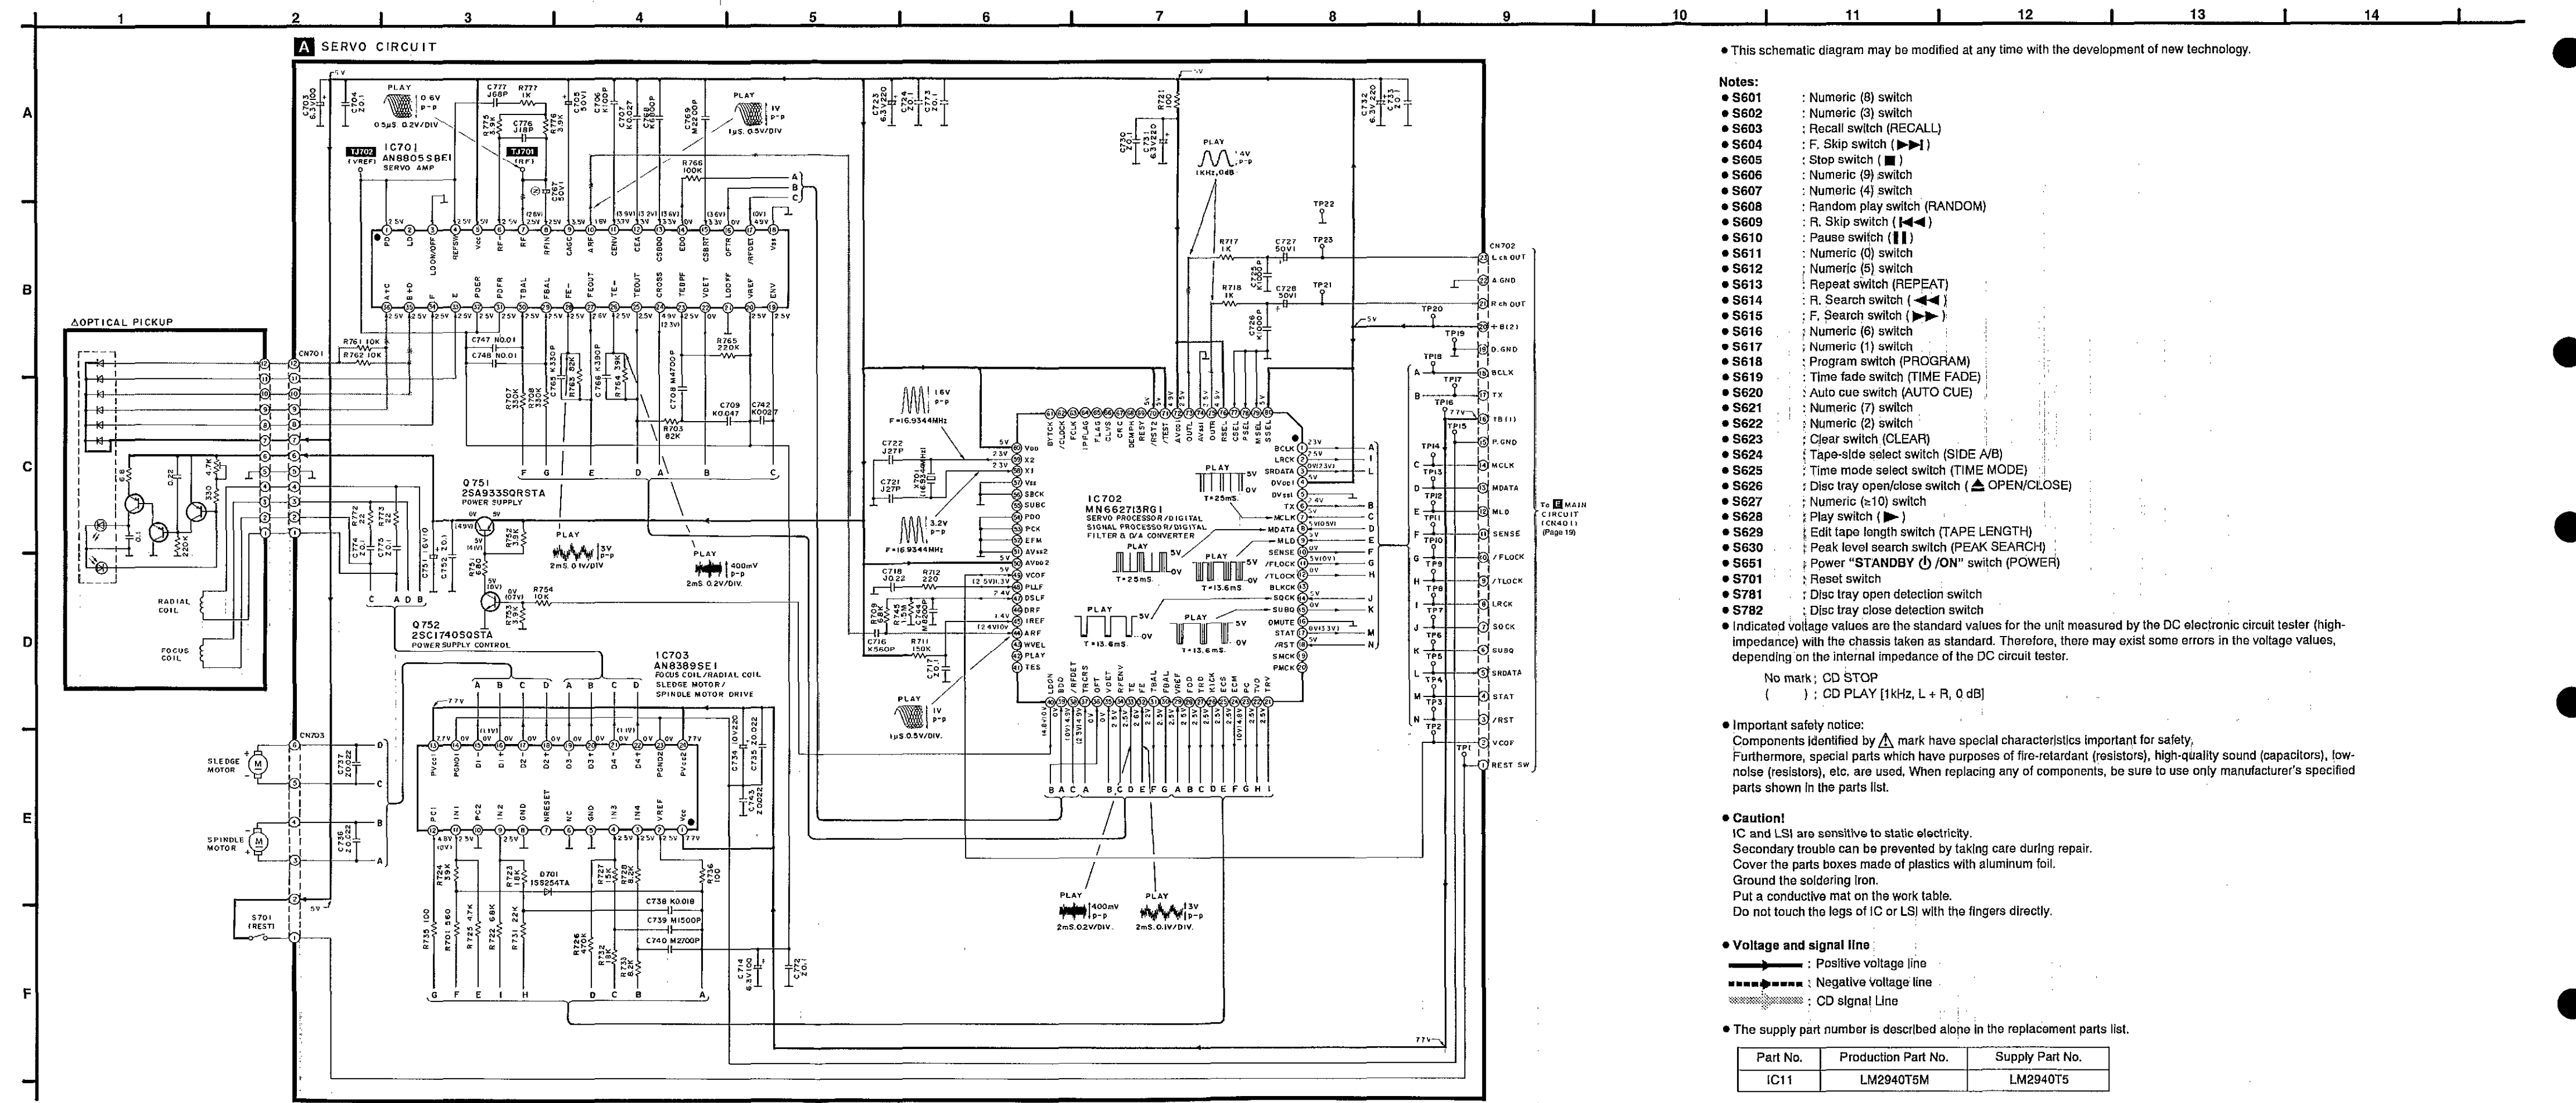








■ Wiring Connection Diagram

NOTES:

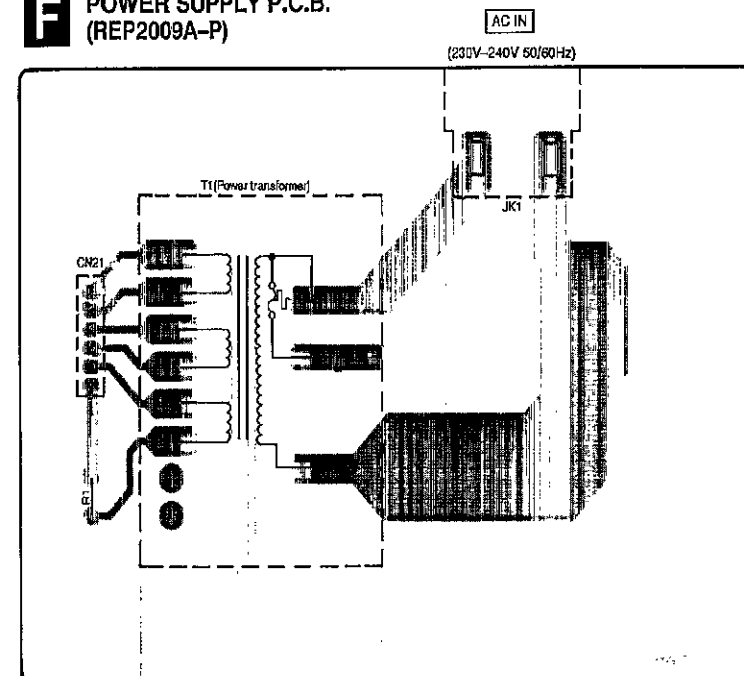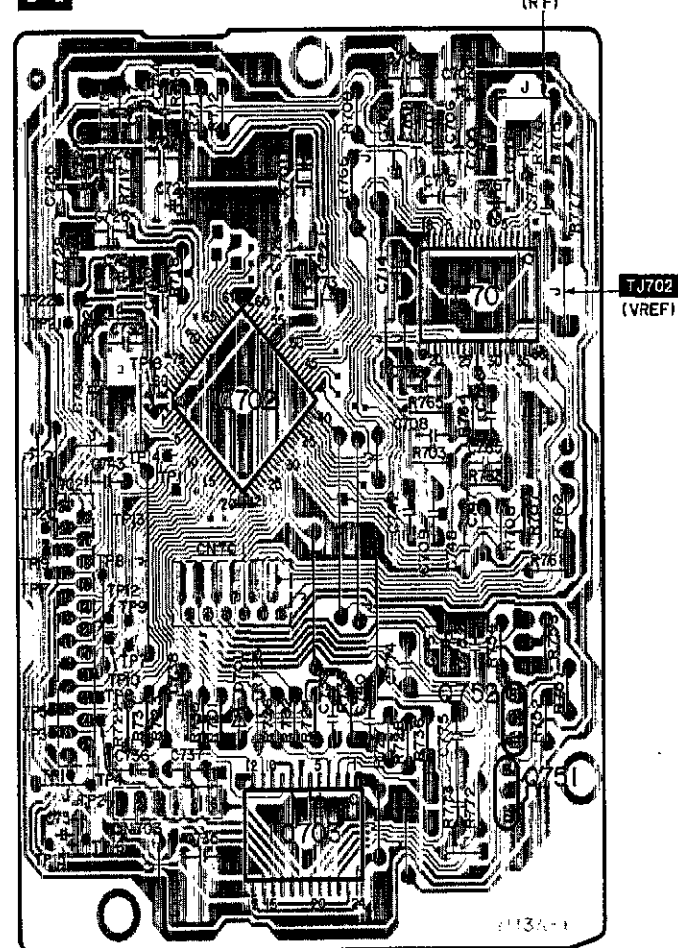


NOTES:

PNK Pink
 RED Red
 SLD Shield Wire
 VLT Violet
 WHT ... White
 YEL Yellow

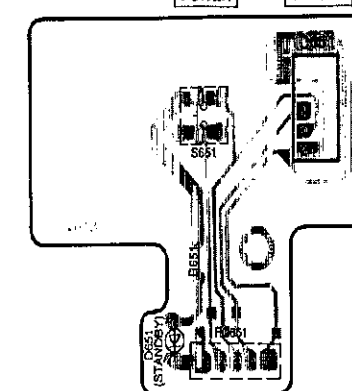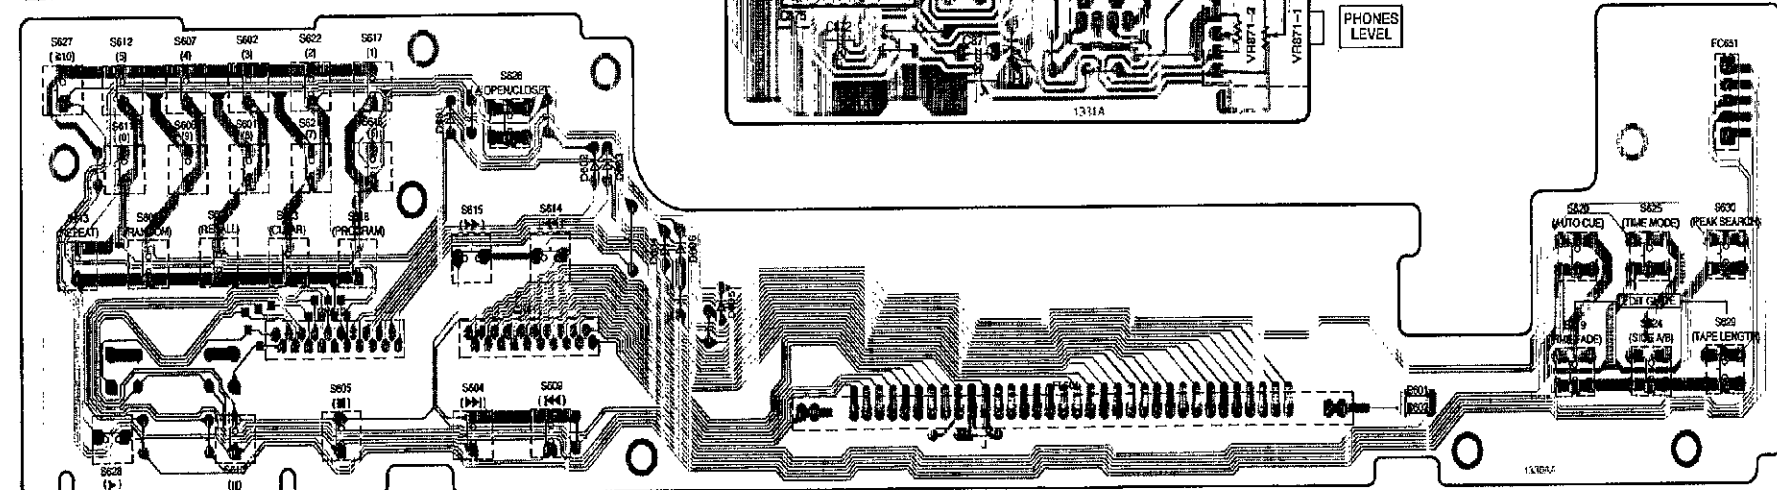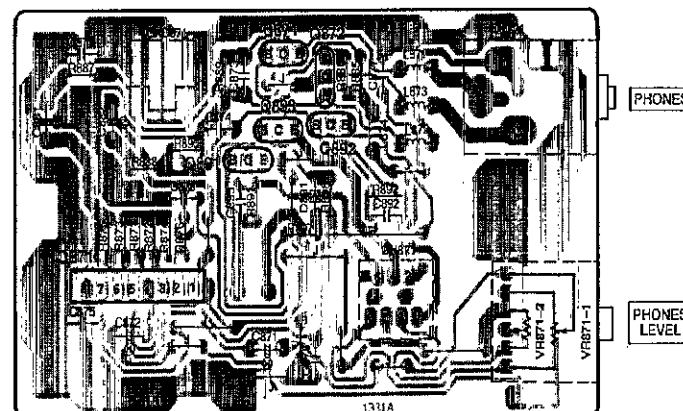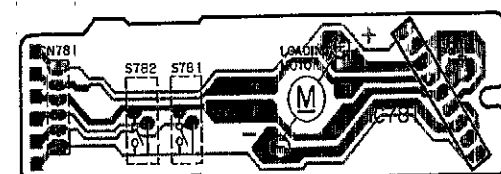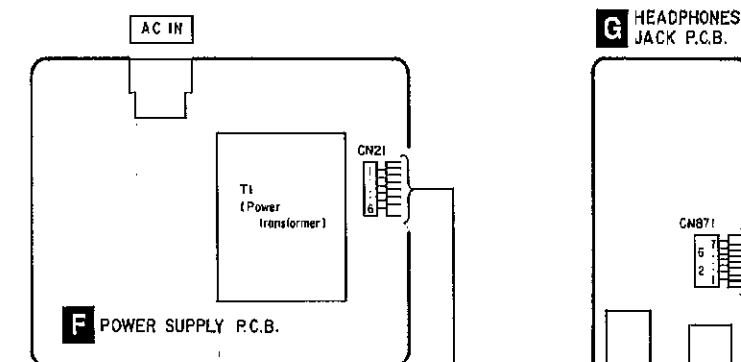


- Terminal guide of IC's, transistors and diodes

BA4580FE1	No.1	LM833M63 8 Pin MC74HC74ADR2 14 Pin MC74HC86DR2 14 Pin MC74HC167DR2 14 Pin AN8805SBE1 36 Pin	MN68474-E 42 Pin MN682713RG1 80 Pin		
UPD78042A014	AN8389SE1	BA4560N	TA7281SA	LM2940T5	RCDHC-Z78N
2SA933SQ 2SC1740SQ DTA114ESTP DTA124ESTP DTC124EST	2SD1450RTA	2SB1238QSTV6 2SB1240-P 2SD1862CRTV6	2SD2037EFTA	1D3-E	
MA4330MTA	MA4039MTA MA4056MTA MA4082MTA	SLR-305LC	1SS254TA		

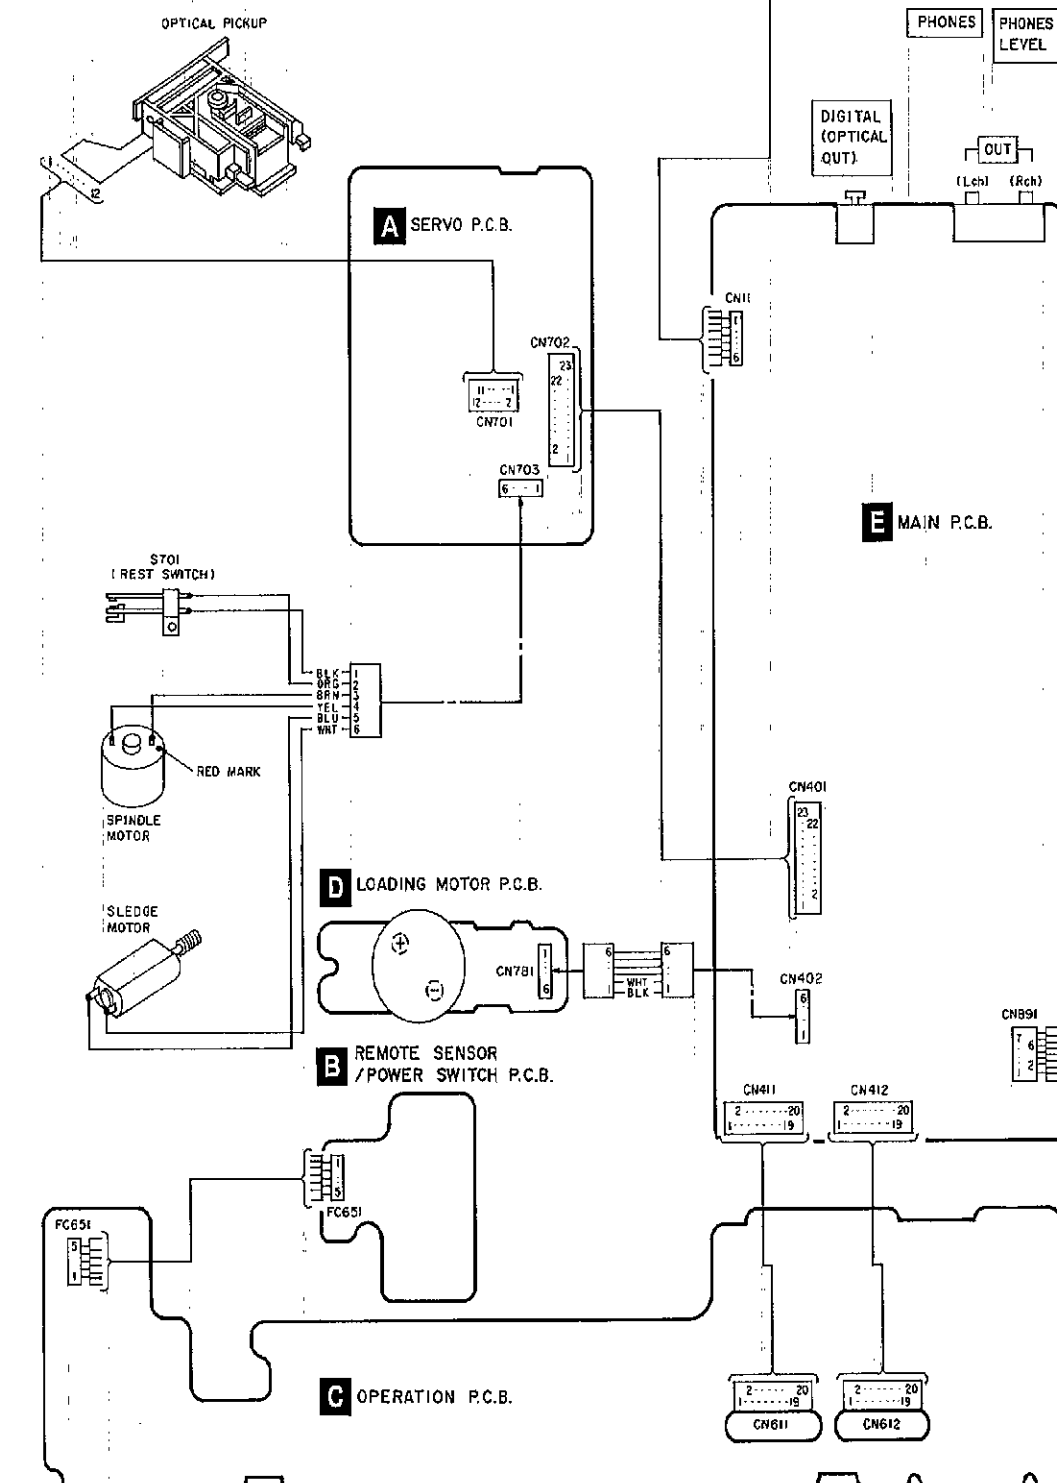

Troubleshooting Guide

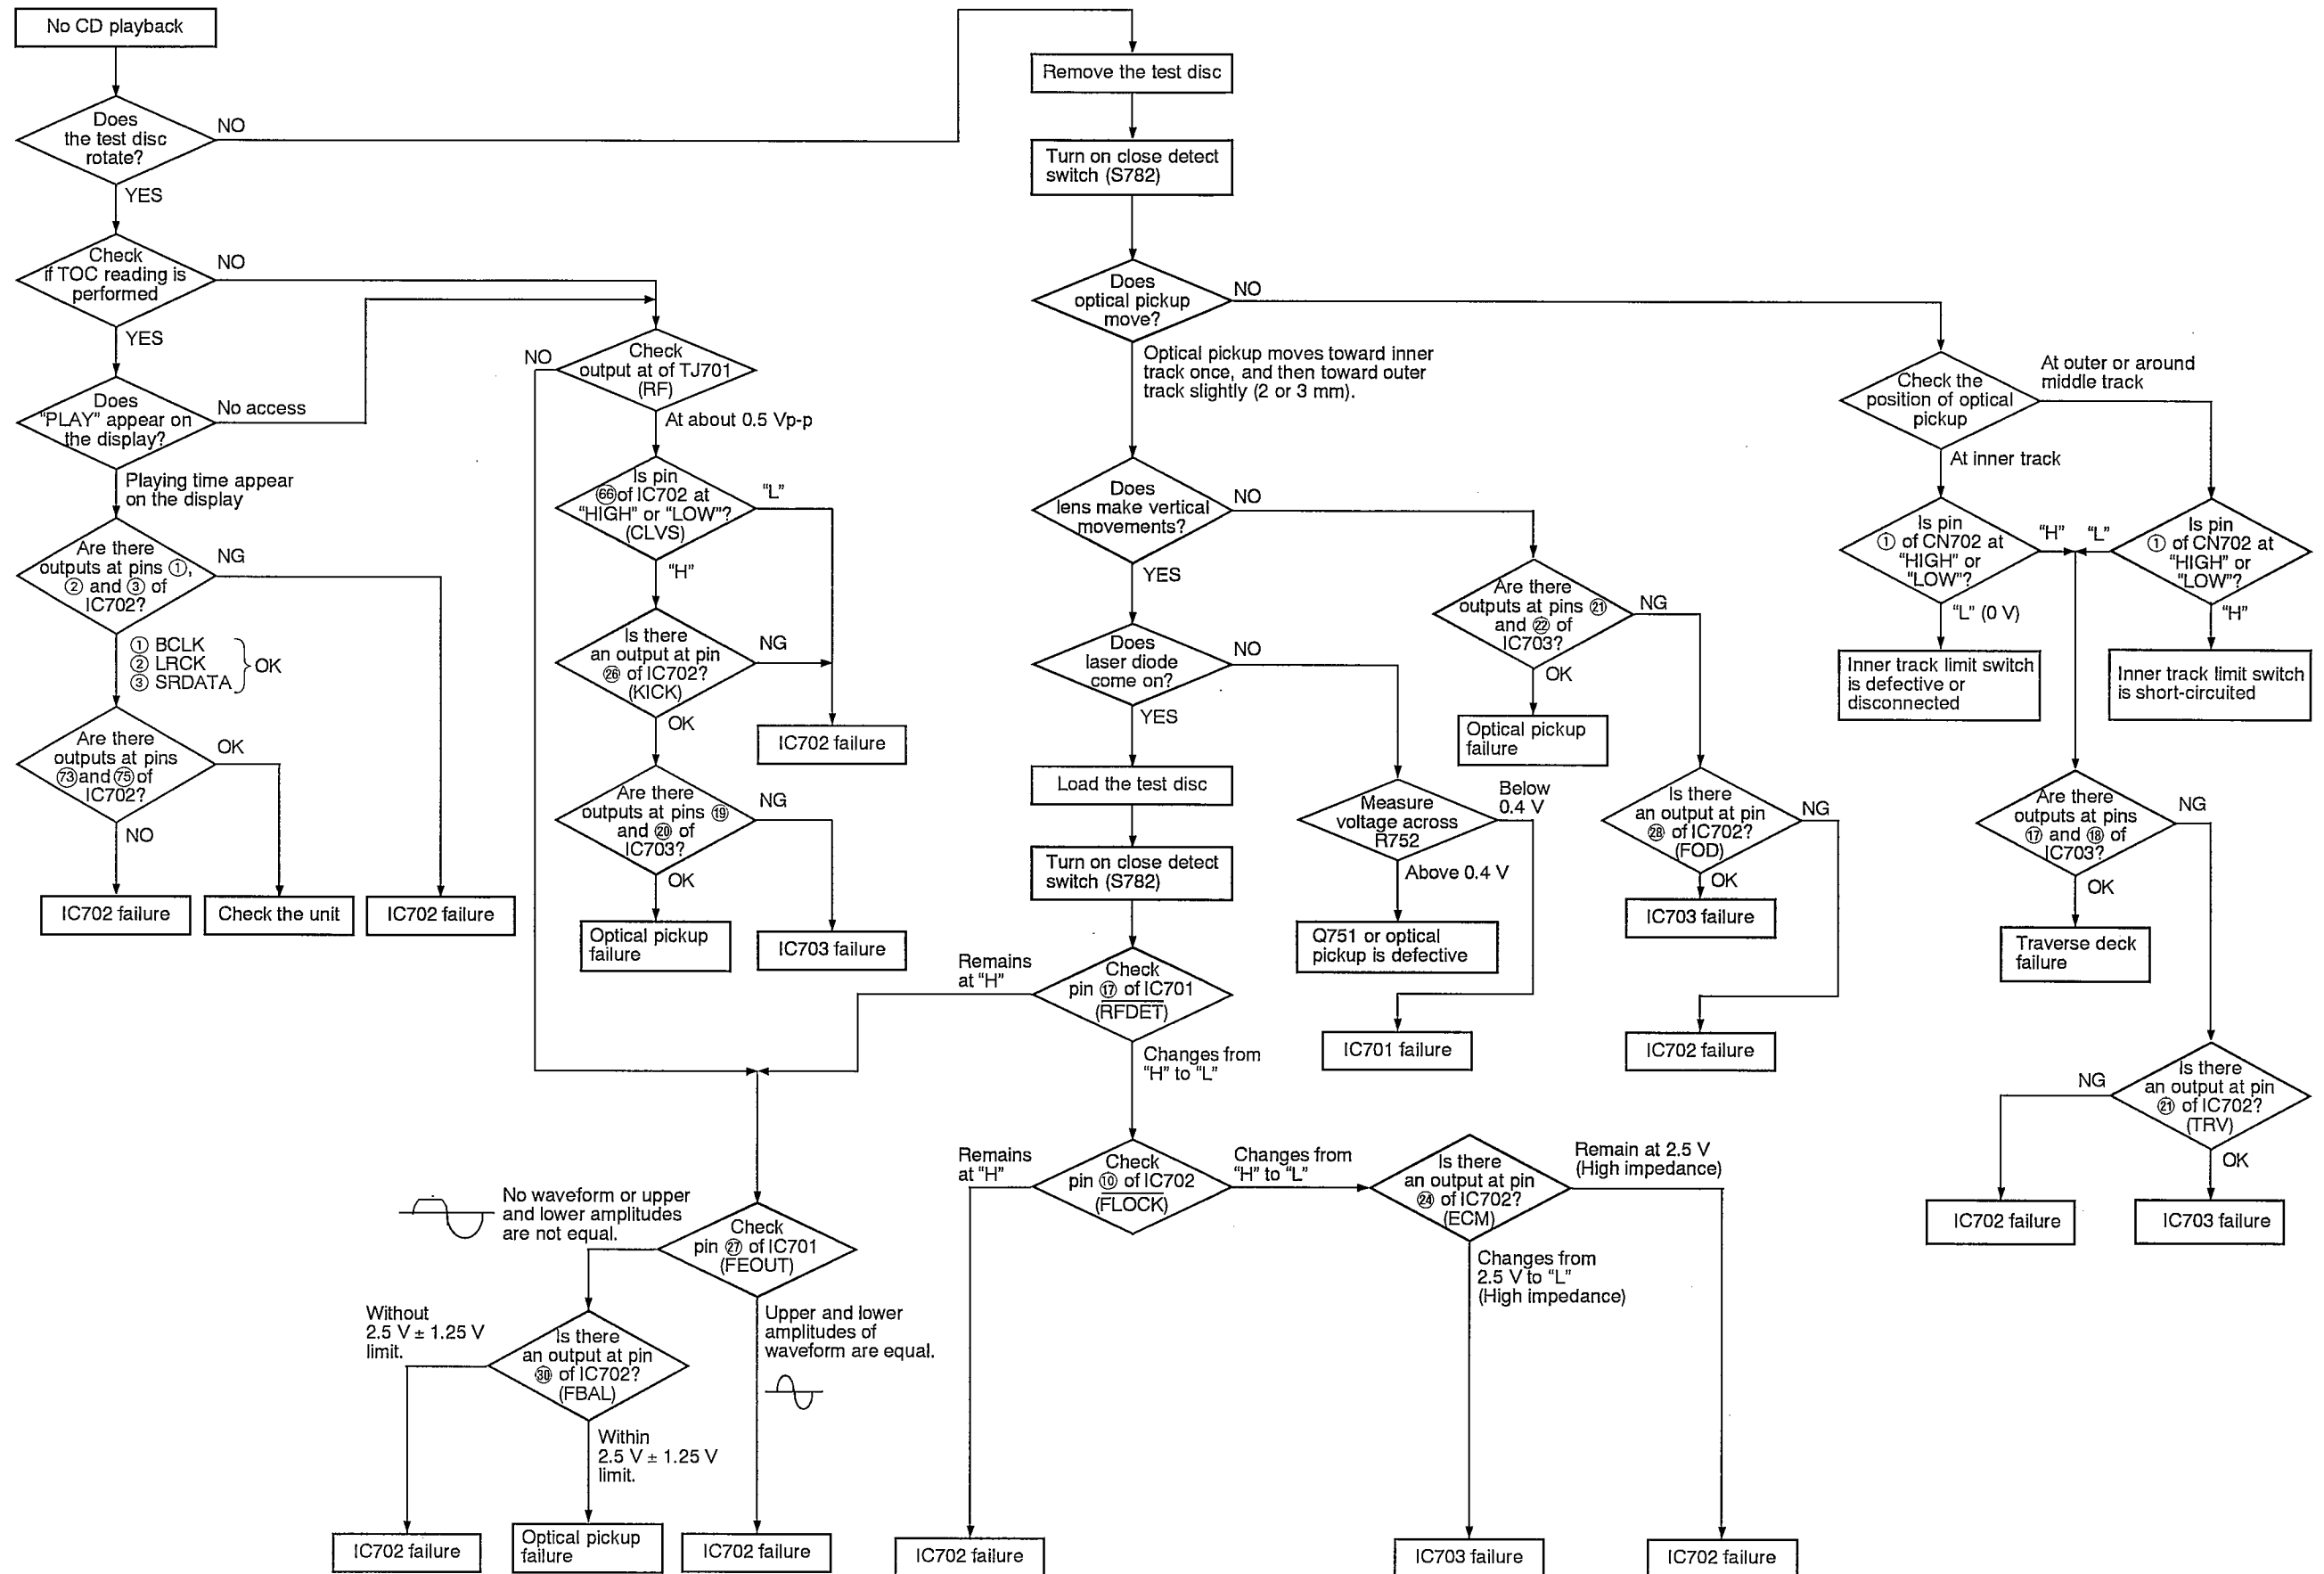

Automatic Adjustment Results Display Function

(Self-Check Function)

This unit has a function that uses the FL display board to indicate the results of automatic adjustment of the servo-circuit (tracking, focus, offset, etc.) as error codes. The error code display indicates the location of failures from automatic adjustment circuit.

The following procedure displays the error codes from the self-diagnostic function.

● Procedure for displaying automatic adjustment codes

1. Plug in the cord and wait for the STANDBY LED to flash, indicating the unit is in standby status.
2. Turn on the power supply switch while pressing the STOP (■), PAUSE (■) and PLAY (▶) buttons at the same time.
3. The "F E C" code is displayed 2 or 3 seconds later to indicate the automatic adjustment results mode.
4. Push the OPEN/CLOSE button to open the disc tray and then load the test disc (SZZP1054C).
5. Push the OPEN/CLOSE button again to close the disc tray.
6. After automatic adjustment, the code display indicates the location of failures in the servo circuit.

● Troubleshooting using the automatic adjustment code

Notes:

1. If "E-00" is displayed as an error code, this means no error was found.
2. Check the disc and laser-detector lens for damage, contamination or stains.

● Take out the test disc and turn off the power, which terminates the automatic adjustment results mode.

FL error code display	Symptom	Probable cause	Signal to check		Normal voltage and waveform values	
			Location	Signal name	PLAY	STOP
E-01	Focus and tracking offset adjustments not completed in specified time period.	① Clocks X1 and X2, power supply VDD, and reset/RST, all on IC702. ② MDATA, MCLK, MLD, and SENSE signals to/from mechanism controller.	IC702 ⑧ pin	MDATA		4.8V
			IC702 ⑦ pin	MCLK		4.8V
			IC702 ⑨ pin	MLD		
			IC702 ⑩ pin	SENSE	0V	0V
			IC702 ⑪ pin	/RST	4.9V	4.9V
			IC702 ⑫ pin	X1		
E-03 E-05 E-07 E-09 E-08 E-0D E-0F	Disc play unstable	① Scratches or contaminants on disc surface ② Focus and Tracking servo circuits (check waveforms, voltages, and part values.) ③ Spindle driver circuit ④ Optical pickup	IC702 ⑬ pin	FE		2.4V
			IC702 ⑭ pin	TE		2.4V
			IC702 ⑮ pin	FOD	2.4V	2.4V
			IC702 ⑯ pin	TRD	2.4V	2.4V
			IC702 ⑰ pin	KICK	2.4V	2.4V
			IC702 ⑱ pin	/FLOCK	0V	4.9V
			IC702 ⑲ pin	/RF DET	0V	4.8V
			TJ701	RF		3.4V
			IC702 ⑳ pin	STAT	4.9V	0V
			IC702 ㉑ pin	FBAL	2.5V ± 1.25V	2.5V ± 1.25V
E-04 E-06 E-0C E-0E	Best "eye" (PD balance) adjustment not completed in specified time period.	① Scratches or contaminants on disc surface ② Focus servo circuits (check waveforms, voltages, and part values.) ③ Optical pickup	TJ701	RF		3.4V
			IC702 ㉒ pin	FE		0V
			IC702 ㉓ pin	OFT	0V	0V
			IC702 ㉔ pin	/TLOCK	0V	0V
E-08 E-0A	Focus or Tracking gain adjustment not completed in specified time period.	① Scratches or contaminants on disc surface ② Focus and Tracking servo circuit (check waveforms, voltages, and part values.) ③ Optical pickup	IC702 ㉕ pin	FE		2.4V
			IC702 ㉖ pin	TE		2.4V
			IC702 ㉗ pin	OFT	0V	0V
			IC702 ㉘ pin	/TLOCK	0V	0V

Function of IC Terminals

● IC401 (UPD78042A014)

Pin No.	Terminal Name	I/O	Function
1	7G	O	FL grid drive signal output
5	1G		
7	1G		
8	VDD	—	Power supply (+ 5V)
9	MCLK	O	Microprocessor command clock
10	MDATA	O	Microprocessor command data
11	STAT	I	Status signal input
12	/MLD	O	Microprocessor command load signal
13	/DMUTE2	O	No used, open
14	SQCK	O	External clock for subcode Q register
15	NC	—	No used, open
16	SUBQ	I	Subcode Q input
17	/RST	I	Reset signal input
18	/OPEN SW	I	Disc tray "open" sense switch status
19	/CLOSE SW	I	Disc tray "close" sense switch status
20	GND	—	Connect to GND
21	/OPEN	O	Open Disc Tray command output
22	/CLOSE	O	Close Disc Tray command output
23	SENSE	I	Sense signal input
24	/FLOCK	I	Focus servo pull-in signal
25	/TLOCK	I	Tracking servo pull-in signal
26	/S RST	O	Reset signal output (for servo)
27	REST SW	I	Innermost track sense switch status
28	/POWER OFF	O	Power off command output
29	VDD	—	Power supply (+ 5V)
30	GND	—	Connect to GND
31	GND	—	Connect to GND
32	NC	—	No used, open
33	GND	—	Connect to GND
34	X1	I	Main clock (4.23 MHz) input
35	X2	O	Main clock output

● IC703 (AN8389SE1)

Pin No.	Terminal Name	I/O	Function
1	Vcc	—	Power supply
2	VREF	I	VREF input
3	IN4	I	Motor driver (4) input
4	IN3	I	Motor driver (3) input
5	GND	—	Ground connection
6	NC	—	Ground connection
7	NRESET	—	Reset input (no used, open)
8	GND	—	Ground connection
9	IN2	I	Motor driver (2) input
10	PC2	I	PC2 (power cut) input
11	IN1	I	Motor driver (1) input
12	PC1	I	PC1 (power cut) input

Pin No.	Terminal Name	I/O	Function
36	P37	I	No used, open
41	P32	I	No used, open
42	P31	I	Connect to GND
43	P30	I	Connect to GND
44	/MRST	O	Reset signal output for MASH (IC801)
45	EMPH	O	Emphasis signal output
46	/DMUTE	O	Muting signal output
47	REMOCON	I	Remote control signal input
48	GND	—	Connect to GND
49	/STANDBY LED	O	STANDBY LED control signal output
50	/PAUSE LED	O	PAUSE LED control signal output
51	/PLAY LED	O	PLAY LED control signal output
52	VDD	—	Power supply (+ 5V)
53	POWER SW	I	Power key switch signal input
54	P126	I	Key return signal input
58	P122	I	Key return signal input
59	P121	—	Connect to GND
60	P120	—	Connect to GND
61	P16	O	FL anode drive signal and key scan signal output
66	P11	O	FL anode drive signal output
67	P10	O	FL anode drive signal output
70	P7	O	FL anode drive signal output
71	VPP	—	Power supply terminal for FL drive (−32V)
72	P6	O	FL anode drive signal output
77	P1	O	FL anode drive signal output
78	10G	O	FL grid drive signal output
80	8G	O	FL grid drive signal output

Pin No.	Terminal Name	I/O	Function
13	PVcc1	—	Power supply (1) for driver
14	PGND1	—	Ground connection (1) for driver
15	D1-	O	Motor driver (1) reverse-action output
16	D1+	O	Motor driver (1) forward-action output
17	D2-	O	Motor driver (2) reverse-action output
18	D2+	O	Motor driver (2) forward-action output
19	D3-	O	Motor driver (3) reverse-action output
20	D3+	O	Motor driver (3) forward-action output
21	D4-	O	Motor driver (4) reverse-action output
22	D4+	O	Motor driver (4) forward-action output
23	PGND2	—	Ground connection (2) for driver
24	PVcc2	—	Power supply (2) for driver

● IC701 (AN8805SBE1)

Pin No.	Terminal Name	I/O	Function
1	PD	I	APC amplifier input
2	LD	O	APC amplifier output (No used, open)
3	LD ON/OFF	I	APC ON/OFF control signal
4	REFSW	I	Capacitor connection for CROSS
5	VCC	—	Power supply
6	RF-	I	RF amplifier inversion signal input
7	RF	O	RF amplifier signal output
8	RFIN	I	AGC signal input
9	CAGC	I	AGC loop filter connection
10	ARF	O	AGC signal output
11	CENV	I	Capacitor connection for RF detection
12	CEA	I	Capacitor connection for HPF amplifier
13	CSBDO	I	Capacitor connection for RF envelope detection
14	EDO	O	BDO signal output
15	CSBRT	I	Capacitor connection for RF envelope detection
16	OFTR	O	OFTR signal output
17	/RFDET	O	RFDET signal output
18	Vss	—	GND
19	ENV	O	3TENV signal output
20	VREF	O	VREF signal output
21	LD OFF	—	APC OFF signal control
22	VDET	O	VDET signal output
23	TEBPF	I	VDET signal input
24	CROSS	O	CROSS signal output
25	TEOUT	O	TE amplifier signal output
26	TE-	I	TE amplifier inversion signal input
27	FEOUT	O	FE amplifier signal output
28	FE-	I	FE amplifier inversion signal input
29	FBAL	I	FBAL control signal
30	TBAL	I	TBAL control signal
31	PDFR	—	Adjustment for I-V amplifier conversion resistor
32	PDER	—	Adjustment for I-V amplifier conversion resistor
33	E	I	I-V amplifier signal input
34	F	I	I-V amplifier signal input
35	B+D	I	I-V amplifier signal input
36	A+C	I	I-V amplifier signal input

● IC702(MN662713RG1)

Pin No.	Terminal Name	I/O	Function
1	BCLK	O	Bit clock output for serial data
2	LRCK	—	LR identification signal output
3	SRDATA	—	Serial data output
4	DVdd1	—	Power supply input (for digital circuit)
5	DVss1	—	GND (for digital circuit)
6	TX	O	Digital audio interface signal output
7	MCLK	I	Microprocessor command clock signal input (Latches data at first transition)
8	MDATA	I	Microprocessor command data signal input
9	MLD	I	Microprocessor command load signal input
10	SENSE	O	Sense signal output (OFT, FESL, MAGEND, NAJEND, POSAD, SFG)
11	/FLOCK	O	Focus servo feeding signal output ("L": Feed)
12	/TLOCK	O	Tracking servo feeding signal output ("L": Feed)
13	BLKCK	O	Sub-code block clock signal output (fBLKCK = 75 Hz during normal playback) (no used, open)
14	SQCK	I	External clock signal input for sub-code Q resistor
15	SUBQ	O	Sub-code Q code output
16	DMUTE	I	Muting input ("H": Mute)
17	STAT	O	Status signal output (CRC, CUE, CLVS, TTSTVP, FCLV, SQCK)
18	/RST	I	Reset input
19	SMCK	—	1/2-divided clock signal of crystal oscillating at MSEL = "H" (fSMCK = 8.4672 MHz) 1/4-divided clock signal of crystal oscillating at MSEL = "L" (fSMCK = 4.2336 MHz) (no used, open)
20	PMCK	—	1/192-divided clock signal of crystal oscillating (fPMCK = 88.2 kHz) (no used, open)
21	TRV	O	Traverse forced feed output
22	TVD	O	Traverse drive output
23	PC	O	Spindle motor ON signal output ("L": ON)
24	ECM	O	Spindle motor drive signal output (forced mode output)
25	ECS	O	Spindle motor drive signal output (servo error signal output)
26	KICK	O	Kick pulse output
27	TRD	O	Tracking drive output
28	FOD	O	Focus drive output
29	VREF	I	D/A (drive) output (TVD, ECS, TRD, FOD, FBAL, TBAL) reference voltage input
30	FBAL	O	Focus balance adjustment output
31	TBAL	O	Tracking balance adjustment output

● IC702 Continued

Pin No.	Terminal Name	I/O	Function
32	FE	I	Focus error signal input (analog input)
33	TE	I	Tracking error signal input (analog input)
34	RFENV	I	RF envelope signal input
35	VDET	I	Vibration detection signal input ("H": detection)
36	OFT	I	Off-track signal input ("H": off track)
37	TRCRS	I	Track cross signal input
38	/RFDET	I	RF detection signal input ("L": detection)
39	BDO	I	Dropout signal input ("H": Dropout)
40	LDON	O	Laser on signal output ("H": ON)
41	TES	O	Tracking error shunt signal output ("H": shunt) (no used, open)
42	PLAY	O	Play signal out ("H": PLAY) (no used, open)
43	WVEL	O	Double speed status signal output ("H": Double speed) (no used, open)
44	ARF	I	RF signal input
45	IREF	I	Reference current input
46	DRF	—	DSL bias (no used, open)
47	DSLIF	I/O	DSL loop filter
48	PLLIF	I/O	PLL loop filter
49	VCOF	I/O	VCO loop filter
50	AVdd2	—	Power supply input (for analog circuit)
51	AVss2	—	GND (for analog circuit)
52	EFM	—	EFM signal output (not used, open)
53	PCK	—	PLL extraction clock output (fPCK = 4.321 MHz during normal playback) (no used, open)
54	PDO	—	Phase comparison signal of EFM and PCK signals (no used, open)
55	SUBC	O	Sub-code serial data output (no used, open)
56	SBCK	I	Clock input for sub-code serial data
57	Vss	—	GND
58	X1	I	Crystal oscillating circuit input (f = 16.9344 MHz)
59	X2	O	Crystal oscillating circuit output (f = 16.9344 MHz)
60	Vdd	—	Power supply input (for oscillating circuit)
61	BYTCK	—	Byte clock output (no used, open)
62	/CLDCK	O	Sub-code frame clock signal output (fCLDCK = 7.35 kHz during normal playback)
63	FCLK	—	Crystal frame clock signal output (fFCLK = 7.35 kHz, double = 14.7 kHz)
64	IPFLAG	O	Interpolation flag output ("H": Interpolation) (no used, open)
65	FLAG	O	Flag output (no used, open)

Pin No.	Terminal Name	I/O	Function
66	CLVS	O	Spindle servo phase synchronizing signal output ("H": CLV, "L": rough servo) (no used, open)
67	CRC	O	Sub-code CRC checked output ("H": OK, "L": NG) (no used, open)
68	DEMPH	O	De-emphasis ON signal output ("H": ON) (no used, open)
69	RESY	—	Frame resynchronizing signal output (no used, open)
70	/RST2	I	Reset input through MASH circuit ("L": Reset)
71	/TEST	I	Test input
72	AVdd1	—	Power supply input (for analog circuit)
73	OUTL	O	Left channel audio signal output
74	AVss1	—	GND
75	OUTR	O	Right channel audio signal output
76	RSEL	I	RF signal polarity assignment input (at "H" level: RSEL = "H") (at "L" level: RSEL = "L")
77	CSEL	I	Crystal oscillating frequency designation input ("L": 16.9344 MHz, "H": 33.8688 MHz)
78	PSEL	I	Test input (normally, "L")
79	MSEL	I	Output frequency switching for SMCK terminal "H": SMCK = 8.4672 MHz "L": SMCK = 4.2336 MHz
80	SSEL	I	Output mode switching of SUBQ terminal ("H": Q code buffer mode)

● IC801 (MN6474E)

Pin No.	Terminal Name	I/O	Function
1	MLD	I	Command load input (load: L) (No used, connected to VDD)
2	RSTB	I	Reset terminal
3	IE	I	No used, connected to GND
4	TP1	—	Test terminal
5	TP2	—	
6	TEST 1	I	Test terminal 1 (connected to GND)
7	TEST 2	I	Test terminal 2 (connected to GND)
8	NC	—	No used, open
9	NC	—	
10	AVDD4	I	Power supply terminal
11	OUTL(−)	O	L-ch data output, (−) terminal
12	AVSS4	—	GND terminal
13	AVSS3	—	GND terminal
14	OUTL(+)	O	L-ch data output, (+) terminal
15	AVDD3	I	Power supply terminal
16	NC	—	No used, open
17	AVDD2	I	Power supply terminal
18	OUTR(+)	O	R-ch data output, (+) terminal
19	AVSS2	—	GND terminal (analog system)
20	AVSS2	—	
21	OUTR(−)	O	R-ch data output, (−) terminal
22	AVDD1	I	Power supply terminal

Pin No.	Terminal Name	I/O	Function
23	DVDD1	I	Power supply terminal
24	DVSS1	—	GND terminal (digital system)
25	X2	O	Crystal OSC terminal (33 MHz)
26	X1	I	
27	NC	—	No used, connected to GND
28	DVDD2	I	Power supply terminal
29	DVSS2	—	GND terminal (digital system)
30	NSUB	I	Sub-strate terminal (No used, connected to VDD)
31	ZFLGB	O	No used, open
32	192 fs	O	192 fs (8.4672 MHz) (No used, open)
33	LRPOL	I	LR clock selector (No used, connected to VDD)
34	LRCLK	I	LR discrimination signal input
35	BCLK	I	Serial bit clock input
36	SRDATA	I	Serial data input (MSB first)
37	DVSS3	—	GND terminal (digital system) (No used, open)
38	DVDD	I	Power supply terminal
39	384 fs	O	384 fs (16.9344 MHz) output
40	PD	I	Power down terminal (No used, connected to GND)
41	MDATA	I	Mode control data (No used, connected to VDD)
42	MCLK	I	Data clock for MDATA (No used, connected to VDD)

■ Replacement Parts List

Notes: *Important safety notice:
Components identified by Δ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of components, be sure to use only manufacture's specified parts shown in the parts list.
*The parenthesized indications in the Remarks columns specify the areas. (Refer to the cover page for area.)
Parts without these indications can be used for all areas.
*Remote Control Ass'y: Supply period for three years from termination of production.
*[MB] Indicates in Remarks columns parts that are supplied by MBV.
*Warning: This product uses a laser diode. Refer to caution statements on page 2.
*ACHTUNG: Die Lasereinheit nicht zerlegen.
Die Lasereinheit darf nur gegen eine vom Hersteller spezifizierte Einheit ausgetauscht werden.
*The "(SF)" mark denotes the standard part.

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT(S)		Q892, 893	2SA933SQR	TRANSISTOR	
						DIODE(S)	
IC11	LM2940T5	I. C. REGULATOR	Δ				
IC302	MC74HC107DR2	I. C. J-K FLIP-FLOP	[MB]	D11-18	1D3-E	DIODE	Δ [MB]
IC303	MC74HC74ADR2	I. C. 0 FLIP-FLOP	[MB]	D19	MA4330MTA	DIODE	Δ
IC304	MC74HC86DR2	I. C. OR GATE	[MB]	D21, 22	MA4082MTA	DIODE	Δ
IC401	UPD78042A014	I. C. SYSTEM CONTROL	[MB]	D25, 26	1SS254TA	DIODE	
IC651	RCDHC-278N	I. C. REMOTE CONTROL RECEIVER		D31, 32	1SS254TA	DIODE	
IC701	AN8805SBE1	I. C. SERVO AMP.	[MB]	D41, 42	1SS254TA	DIODE	
IC702	MN662713RG1	I. C. SERVO PROCESSOR	[MB]	D51	MA4039MTA	DIODE	
IC703	AN8389SE1	I. C. MOTOR DRIVE		D301-305	1SS254TA	DIODE	
IC781	TA7291SA	I. C. MOTOR DRIVE		D401	MA4056MTA	DIODE	Δ
IC801	MN6474E	I. C. DIGITAL FILTER	[MB]	D601-606	1SS254TA	DIODE	
IC802	LM833M63	I. C. DIFFERENTIAL AMP.		D651	SLR-305LC	L. E. D	
IC871	BA4560N	I. C. HEADPHONES AMP.		D701	1SS254TA	DIODE	
IC891	BA4560FE1	I. C. L. P. FILTER AMP.	[MB]	D801, 802	1SS254TA	DIODE	
		TRANSISTOR(S)		D851	1D3-E	DIODE	[MB]
				D861	1SS254TA	DIODE	
				D891	1SS254TA	DIODE	
Q11	2SD2037EFTA	TRANSISTOR	Δ			VARIABLE RESISTOR(S)	
Q12	2SB1240-P	TRANSISTOR	Δ				
Q13	2SD1862QRTV6	TRANSISTOR	Δ	VR871	EWCU1A016A15	V. R. HEADPHONES LEVEL	[MB]
Q15	2SA933SQR	TRANSISTOR	Δ			COMPONENT COMBINATION(S)	
Q16	2SB1238QSTV6	TRANSISTOR	Δ				
Q19, 20	2SD1450RTA	TRANSISTOR		Z301	EXCELDR35V	COMBINATION PART	
Q21	DTA124ESTP	TRANSISTOR		Z851	EXCELDR35V	COMBINATION PART	
Q22	2SC1740SQ	TRANSISTOR				COIL(S)	
Q23	2SD2037EFTA	TRANSISTOR	Δ				
Q31	2SD1862QRTV6	TRANSISTOR	Δ	L301	RLQZN4R7KL-D	COIL	
Q32	2SB1240-P	TRANSISTOR	Δ	L801-804	RLQZN471KL-D	COIL	[MB]
Q33	2SC1740SQ	TRANSISTOR	Δ	L861	RLQZN4R7KL-D	COIL	
Q34	2SA933SQR	TRANSISTOR	Δ	L871-873	RLQZN3R3KL-D	COIL	[MB]
Q41	DTA124ESTP	TRANSISTOR		L874	RLQZN4R7KL-D	COIL	
Q51, 52	2SC1740SQ	TRANSISTOR				TRANSFORMER(S)	
Q401, 402	2SD1862QRTV6	TRANSISTOR	Δ				
Q751	2SA933SQR	TRANSISTOR		T1	RTP1K4B020	TRANSFORMER	Δ [MB]
Q752	2SC1740SQ	TRANSISTOR				OSCILLATOR(S)	
Q801, 802	2SC1740SQ	TRANSISTOR					
Q803, 804	2SD1450RTA	TRANSISTOR		X401	RSXY4M23M01T	OSCILLATOR (4. 23MHz)	
Q851	DTC124EST	TRANSISTOR					
Q853	DTA114ESTP	TRANSISTOR					
Q854	DTA124ESTP	TRANSISTOR					
Q871, 872	2SD1450RTA	TRANSISTOR					
Q891	2SC1740SQ	TRANSISTOR					

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
X701	RSXZ16M9M01T	OSCILLATOR(16. 9MHz)		CN702	RJS1A6723-1Q	SOCKET(23P)	
X801	RSXA33M8J01T	OSCILLATOR(33. 8MHz)	[MB]	CN703	RJT029W06VT	CONNECTOR(6P)	
				CN781	RJP6G17ZA	PLUG(6P)	
		DISPLAY TUBE		CN871	RJS2A2107T	SOCKET(7P)	[MB]
				CN891	RJS2A2107T	SOCKET(7P)	[MB]
FL601	RSL0188-F	DISPLAY TUBE	[MB]			EARTH PLATE	
		SWITCH(ES)		GND871	RMCD184	EARTH PLATE	[MB]
S601	EVQ21405R	SW, 8					
S602	EVQ21405R	SW, 3				JACK(S)	
S603	EVQ21405R	SW, RECALL					
S604	EVQ21405R	SW, F. SKIP		JK1	SJS9236	AC INLET	△
S605	EVQ21405R	SW, STOP		JK301	T0TX174-A	OPTICAL OUT	
S606	EVQ21405R	SW, 9		JK801	RJH3201N	LINE OUT	
S607	EVQ21405R	SW, 4		JK871	QJAD455ZC-A	HEADPHONES JACK	
S608	EVQ21405R	SW, RANDOM					
S609	EVQ21405R	SW, R. SKIP					
S610	EVQ21405R	SW, PAUSE					
S611	EVQ21405R	SW, 0					
S612	EVQ21405R	SW, 5					
S613	EVQ21405R	SW, REPEAT					
S614	EVQ21405R	SW, R. SEARCH					
S615	EVQ21405R	SW, F. SEARCH					
S616	EVQ21405R	SW, 6					
S617	EVQ21405R	SW, 1					
S618	EVQ21405R	SW, PROGRAM					
S619	EVQ21405R	SW, TIME FADE					
S620	EVQ21405R	SW, AUTO CUE					
S621	EVQ21405R	SW, 7					
S622	EVQ21405R	SW, 2					
S623	EVQ21405R	SW, CLEAR					
S624	EVQ21405R	SW, SIDE A/B					
S625	EVQ21405R	SW, TIME MODE					
S626	EVQ21405R	SW, OPEN/CLOSE					
S627	EVQ21405R	SW, >10					
S628	EVQ21405R	SW, PLAY					
S629	EVQ21405R	SW, TAPE LENGTH					
S630	EVQ21405R	SW, PEAK SEARCH					
S651	EVQ21405R	SW, POWER					
S781	RSH1A005	SW, TRAY OPEN DET.					
S782	RSH1A005	SW, TRAY CLOSE DET.					
		CONNECTOR(S)					
CN11	RJS1A6606	SOCKET(6P)					
CN21	RJS1A6606	SOCKET(6P)					
CN401	RJS1A6823	SOCKET(23P)					
CN402	RJT029W06VT	CONNECTOR(6P)					
CN411, 412	RJU076W20M	SOCKET(20P)					
CN611, 612	RJT076W20M	CONNECTOR(20P)	[MB]				
CN701	RJS12Q9ZA	SOCKET(12P)	[MB]				


Notes : * Capacity values are in microfarads (uF) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)
 * Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM) , 1M=1,000k (OHM)

Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks	Ref. No.	Part No.	Values & Remarks
		RESISTORS	R728	ERDS2TJ822	1/4W 8.2K	C12	ECBT1C103NS5	16V 0.01U
			R731	ERDS2TJ223	1/4W 22K	C13	ECEA1AKA330B	10V 33U
			R732	ERDS2TJ183T	1/4W 18K	C14	ECEA0JKA470B	6.3V 47U
R1	ERQ16NKR15E	1W 0.15	R733	ERDS2TJ822	1/4W 8.2K	C15, 16 △	ECA1EPXS471B	25V 470U
R12, 13	ERDS2TJ222	1/4W 2.2K	R735, 736	ERDS2TJ101	1/4W 100	C17, 18	ECEA1HU101	50V 100U
R16	ERDS2TJ680T	1/4W 68	R745	ERDS2TJ155	1/4W 1.5M	C20, 21	ECA1EPXS101B	25V 100U
R17	ERDS2TJ471	1/4W 470	R751	ERDS2TJ681	1/4W 680	C22	ECEA1AU331	10V 330U
R18	ERDS2TJ473	1/4W 47K	R752, 753	ERDS2TJ392T	1/4W 3.9K	C31, 32	ECBT1H102KB5	50V 1000P
R19	ERDS2TJ472	1/4W 4.7K	R754	ERDS2TJ103	1/4W 10K	C33, 34	ECA1EPXS101B	25V 100U
R20	ERDS2TJ223	1/4W 22K	R761, 762	ERDS2TJ103	1/4W 10K	C51	ECEA1AKA220B	10V 22U
R23	ERDS2TJ103	1/4W 10K	R763	ERDS2TJ823T	1/4W 82K	C301	ECEA0JKA101B	6.3V 100U
R24-27	ERDS2TJ1R0	1/4W 1.0	R764	ERDS2TJ393	1/4W 39K	C302	ECFR1E104ZF5	25V 0.1U
R28, 29	ERDS2TJ103	1/4W 10K	R765	ERDS2TJ224T	1/4W 220K	C303	ECBT1H101KB5	50V 100P
R30	ERDS2TJ223	1/4W 22K	R766	ERDS2TJ104	1/4W 100K	C304	ECEA0JKA101B	6.3V 100U
R31, 32	ERDS2TJ471	1/4W 470	R772, 773	ERDS2TJ220T	1/4W 22	C305	ECFR1E104ZF5	25V 0.1U
R33, 34	ERDS2TJ105T	1/4W 1M	R775, 776	ERDS2TJ392T	1/4W 3.9K	C311	ECFR1E104ZF5	25V 0.1U
R41	ERDS2TJ222	1/4W 2.2K	R777	ERDS2TJ102	1/4W 1K	C401	ECFR1E104ZF5	25V 0.1U
R51	ERDS2TJ331	1/4W 330	R801-804	ERDS2TJ330	1/4W 33	C402	ECEA0JU102	6.3V 1000U
R52	ERDS2TJ272T	1/4W 2.7K	R805-808	ERDS2TJ433	1/4W 43K	C404	ECFR1E104ZF5	25V 0.1U
R53, 54	ERDS2TJ472	1/4W 4.7K	R809-812	ERDS2TJ563	1/4W 56K	C405	ECEA0JKA101B	6.3V 100U
R301	ERDS2TJ331	1/4W 330	R813, 814	ERDS2TJ472	1/4W 4.7K	C451	ECBT1H101KB5	50V 100P
R302	ERDS2TJ101	1/4W 100	R817, 818	ERDS2TJ221	1/4W 220	C703	ECEA0JKA101I	6.3V 100U
R303, 304	ERDS2TJ220T	1/4W 22	R819, 820	ERDS2TJ511	1/4W 510	C704	ECFR1E104ZF5	25V 0.1U
R308	ERDS2TJ470	1/4W 47	R825, 826	ERDS2TJ102	1/4W 1K	C705	ECEA1HKA010I	50V 1U
R310	ERDS2TJ102	1/4W 1K	R829, 830	ERDS2TJ331	1/4W 330	C706	ECBT1H101KB5	50V 100P
R311	ERDS2TJ822	1/4W 8.2K	R831, 832	ERDS2TJ473	1/4W 47K	C707	ECFR1C273KR	16V 0.027U
R401	ERDS2TJ102	1/4W 1K	R833	ERDS2TJ472	1/4W 4.7K	C708	ECBT1C472MR5	16V 4700P
R403, 404	ERDS2TJ103	1/4W 10K	R837, 838	ERDS2TJ100	1/4W 10	C709	ECFR1C473KR	16V 0.047U
R405, 406	ERDS2TJ471	1/4W 470	R841, 842	ERDS2TJ470	1/4W 47	C714	ECEA0JKA101I	6.3V 100U
R407	ERDS2TJ101	1/4W 100	R852	ERDS2TJ222	1/4W 2.2K	C716	ECBT1H561KB5	50V 560P
R408-412	ERDS2TJ103	1/4W 10K	R853	ERDS2TJ331	1/4W 330	C717	ECFR1E104ZF5	25V 0.1U
R414, 415	ERDS2TJ103	1/4W 10K	R857, 858	ERDS2TJ222	1/4W 2.2K	C718	RCQ52C0224J9	63V 0.22U
R451	ERDS2TJ471	1/4W 470	R859, 860	ERDS2TJ105T	1/4W 1M	C721, 722	ECBT1H270J5	50V 27P
R601, 602	ERDS2TJ100	1/4W 10	R861	ERDS2TJ102	1/4W 1K	C723	ECEA0JKA221I	6.3V 220U
R651	ERDS2TJ221	1/4W 220	R871, 872	ERDS2TJ473	1/4W 47K	C724	ECFR1E104ZF5	25V 0.1U
R701	ERDS2TJ561	1/4W 560	R873-876	ERDS2TJ104	1/4W 100K	C725, 726	ECBT1H102KB5	50V 1000P
R703	ERDS2TJ823T	1/4W 82K	R885, 886	ERDS2TJ222	1/4W 2.2K	C727, 728	ECEA1HKA010I	50V 1U
R707, 708	ERDS2TJ334	1/4W 330K	R887, 888	ERDS2TJ101	1/4W 100	C730	ECFR1E104ZF5	25V 0.1U
R709	ERDS2TJ683	1/4W 68K	R889, 890	ERDS2TJ473	1/4W 47K	C731, 732	ECEA0JKA221I	6.3V 220U
R711	ERDS2TJ154	1/4W 150K	R891, 892	ERDS2TJ102	1/4W 1K	C733	ECFR1E104ZF5	25V 0.1U
R712	ERDS2TJ221	1/4W 220	R893, 894	ERDS2TJ472	1/4W 4.7K	C734	ECEA1AKA221I	10V 220U
R717, 718	ERDS2TJ102	1/4W 1K	R895, 896	ERDS2TJ471	1/4W 470	C735-737	ECBT1E223ZF	25V 0.022U
R721	ERDS2TJ101	1/4W 100	R897	ERDS2TJ103	1/4W 10K	C738	ECFR1C183KR	16V 0.018U
R722	ERDS2TJ683	1/4W 68K	R898	ERDS2TJ822	1/4W 8.2K	C739	ECBT1C152MR5	16V 1500P
R723	ERDS2TJ183T	1/4W 18K				C740	ECBT1C272MR5	16V 2700P
R724	ERDS2TJ393	1/4W 39K			CAPACITORS	C742	ECFR1C273KR	16V 0.027U
R725	ERDS2TJ472	1/4W 4.7K				C743	ECBT1E223ZF	25V 0.022U
R726	ERDS2TJ474	1/4W 470K	C1	ECFTD103KXL	50V 0.01U	C744	ECBT1C822MS5	16V 8200P
R727	ERDS2TJ153	1/4W 15K	C11 △	ECA1CM222B	16V 2200U	C747, 748	ECBT1C103NS5	16V 0.01U

■ Cabinet Parts Location

Ref. No.	Part No.	Values & Remarks
C751	ECEA1CKA1001	16V 10U
C752	ECFR1E104ZF5	25V 0.1U
C765	ECBT1H331KB5	50V 330P
C766	ECBT1H391KB5	50V 390P
C767	ECEA1HW0101	50V 1U
C768	ECFR1E682KR	25V 6800P
C769	ECBT1C222MR5	16V 2200P
C772-775	ECFR1E104ZF5	25V 0.1U
C776	ECBT1H180J5	50V 18P
C777	ECBT1H680J5	50V 68P
C781	ECEA1AKA1011	10V 100U
C801-804	RCQ52C0683J9	63V 0.068U
C805-808	ECBT1H121KB5	50V 120P
C811, 812	RCQ52C0683J9	63V 0.068U
C817	ECFR1E104ZF5	25V 0.1U
C819, 820	ECBT1H102KB5	50V 1000P
C831	ECFR1E104ZF5	25V 0.1U
C832	ECEA0JU331B	6.3V 330U
C833	ECFR1E104ZF5	25V 0.1U
C834	ECEA0JU331B	6.3V 330U
C835-837	ECFR1E104ZF5	25V 0.1U
C838	ECBT1H5R6K5	50V 5.6P
C840	ECBT1H5R6K5	50V 5.6P
C841	ECEA0JKA101B	6.3V 100U
C842	ECFR1E104ZF5	25V 0.1U
C852	ECEA1CKA100B	16V 10U
C853	ECEA1CU102B	16V 1000U
C860	ECFR1E104ZF5	25V 0.1U
C871, 872	ECEA1EKV3R3B	25V 3.3U
C873, 874	ECOB1H103JF3	50V 0.01U
C875-879	ECBT1C103NS5	16V 0.01U
C881, 882	ECEA1AN101XB	10V 100U
C892	ECBT1C103NS5	16V 0.01U
C893, 894	ECA1CPXS470B	16V 47U
C895	ECBT1C103NS5	16V 0.01U

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET PARTS	
1	RKMD152-K	CABINET	[MB]
2	RYP0546Z-K	FRONT PANEL ASS'Y	[MB]
2-1	RGU1145B-K	MAIN BUTTON	[MB]
2-2	RGU1146B-K	SUB BUTTON	[MB]
2-3	RKMD359B-R	FL. PANEL	[MB]
3	RGMD164B-B	REAR PANEL	[MB] (E, EG)
3	RFKHLPS670AB	REAR PANEL ASS'Y	[MB] (EB)
4	RKMD052-K	BOTTOM BASE	[MB]
5	RKMD179-1	BOTTOM CHASSIS	[MB]
6	RHD30035-K	SCREW	
7	XTBS3+8JFZ1	SCREW	
8	REX0577	CABLE ASS'Y (6P)	[MB]
9	RGMD676-K	ORNAMENT	[MB]
10	RHD30052	SCREW	[MB]
11	RHD30053	SCREW	[MB]
12	RKA0040B	FOOT	[MB]
13	RMMD377-1	P. C. B. SUPPORT	[MB]
14	RMMD810-W	SPACER	[MB]
15	RWJ5223130EE	FPC (23P)	[MB]
16	RWJ6406120XX	FLAT CABLE (6P)	[MB]
17	XTB3+10GFZ	SCREW	
18	RMMD811-K	FL. HOLDER	[MB]
19	RWJ6405150XX	FLAT CABLE (5P) FC651	[MB]
20	RGLO267-Q	LED INDICATOR	[MB]
21	RGMD048-1K	H. P. VOLUME KNOB	[MB]
22	RHD26021	SCREW	[MB]
23	RMMD298	HOLDER	[MB]
25	RMV0079	SHEET (MAIN BUTTON)	[MB]
26	RMV0080	SHEET (MAIN BUTTON)	[MB]
27	RWJ6807450XX	FLAT CABLE (7P)	[MB]
28	RGU1029-K	POWER BUTTON	[MB]
29	XTB3+20JFZ	SCREW	
30	XTB3+10JFZ	SCREW	

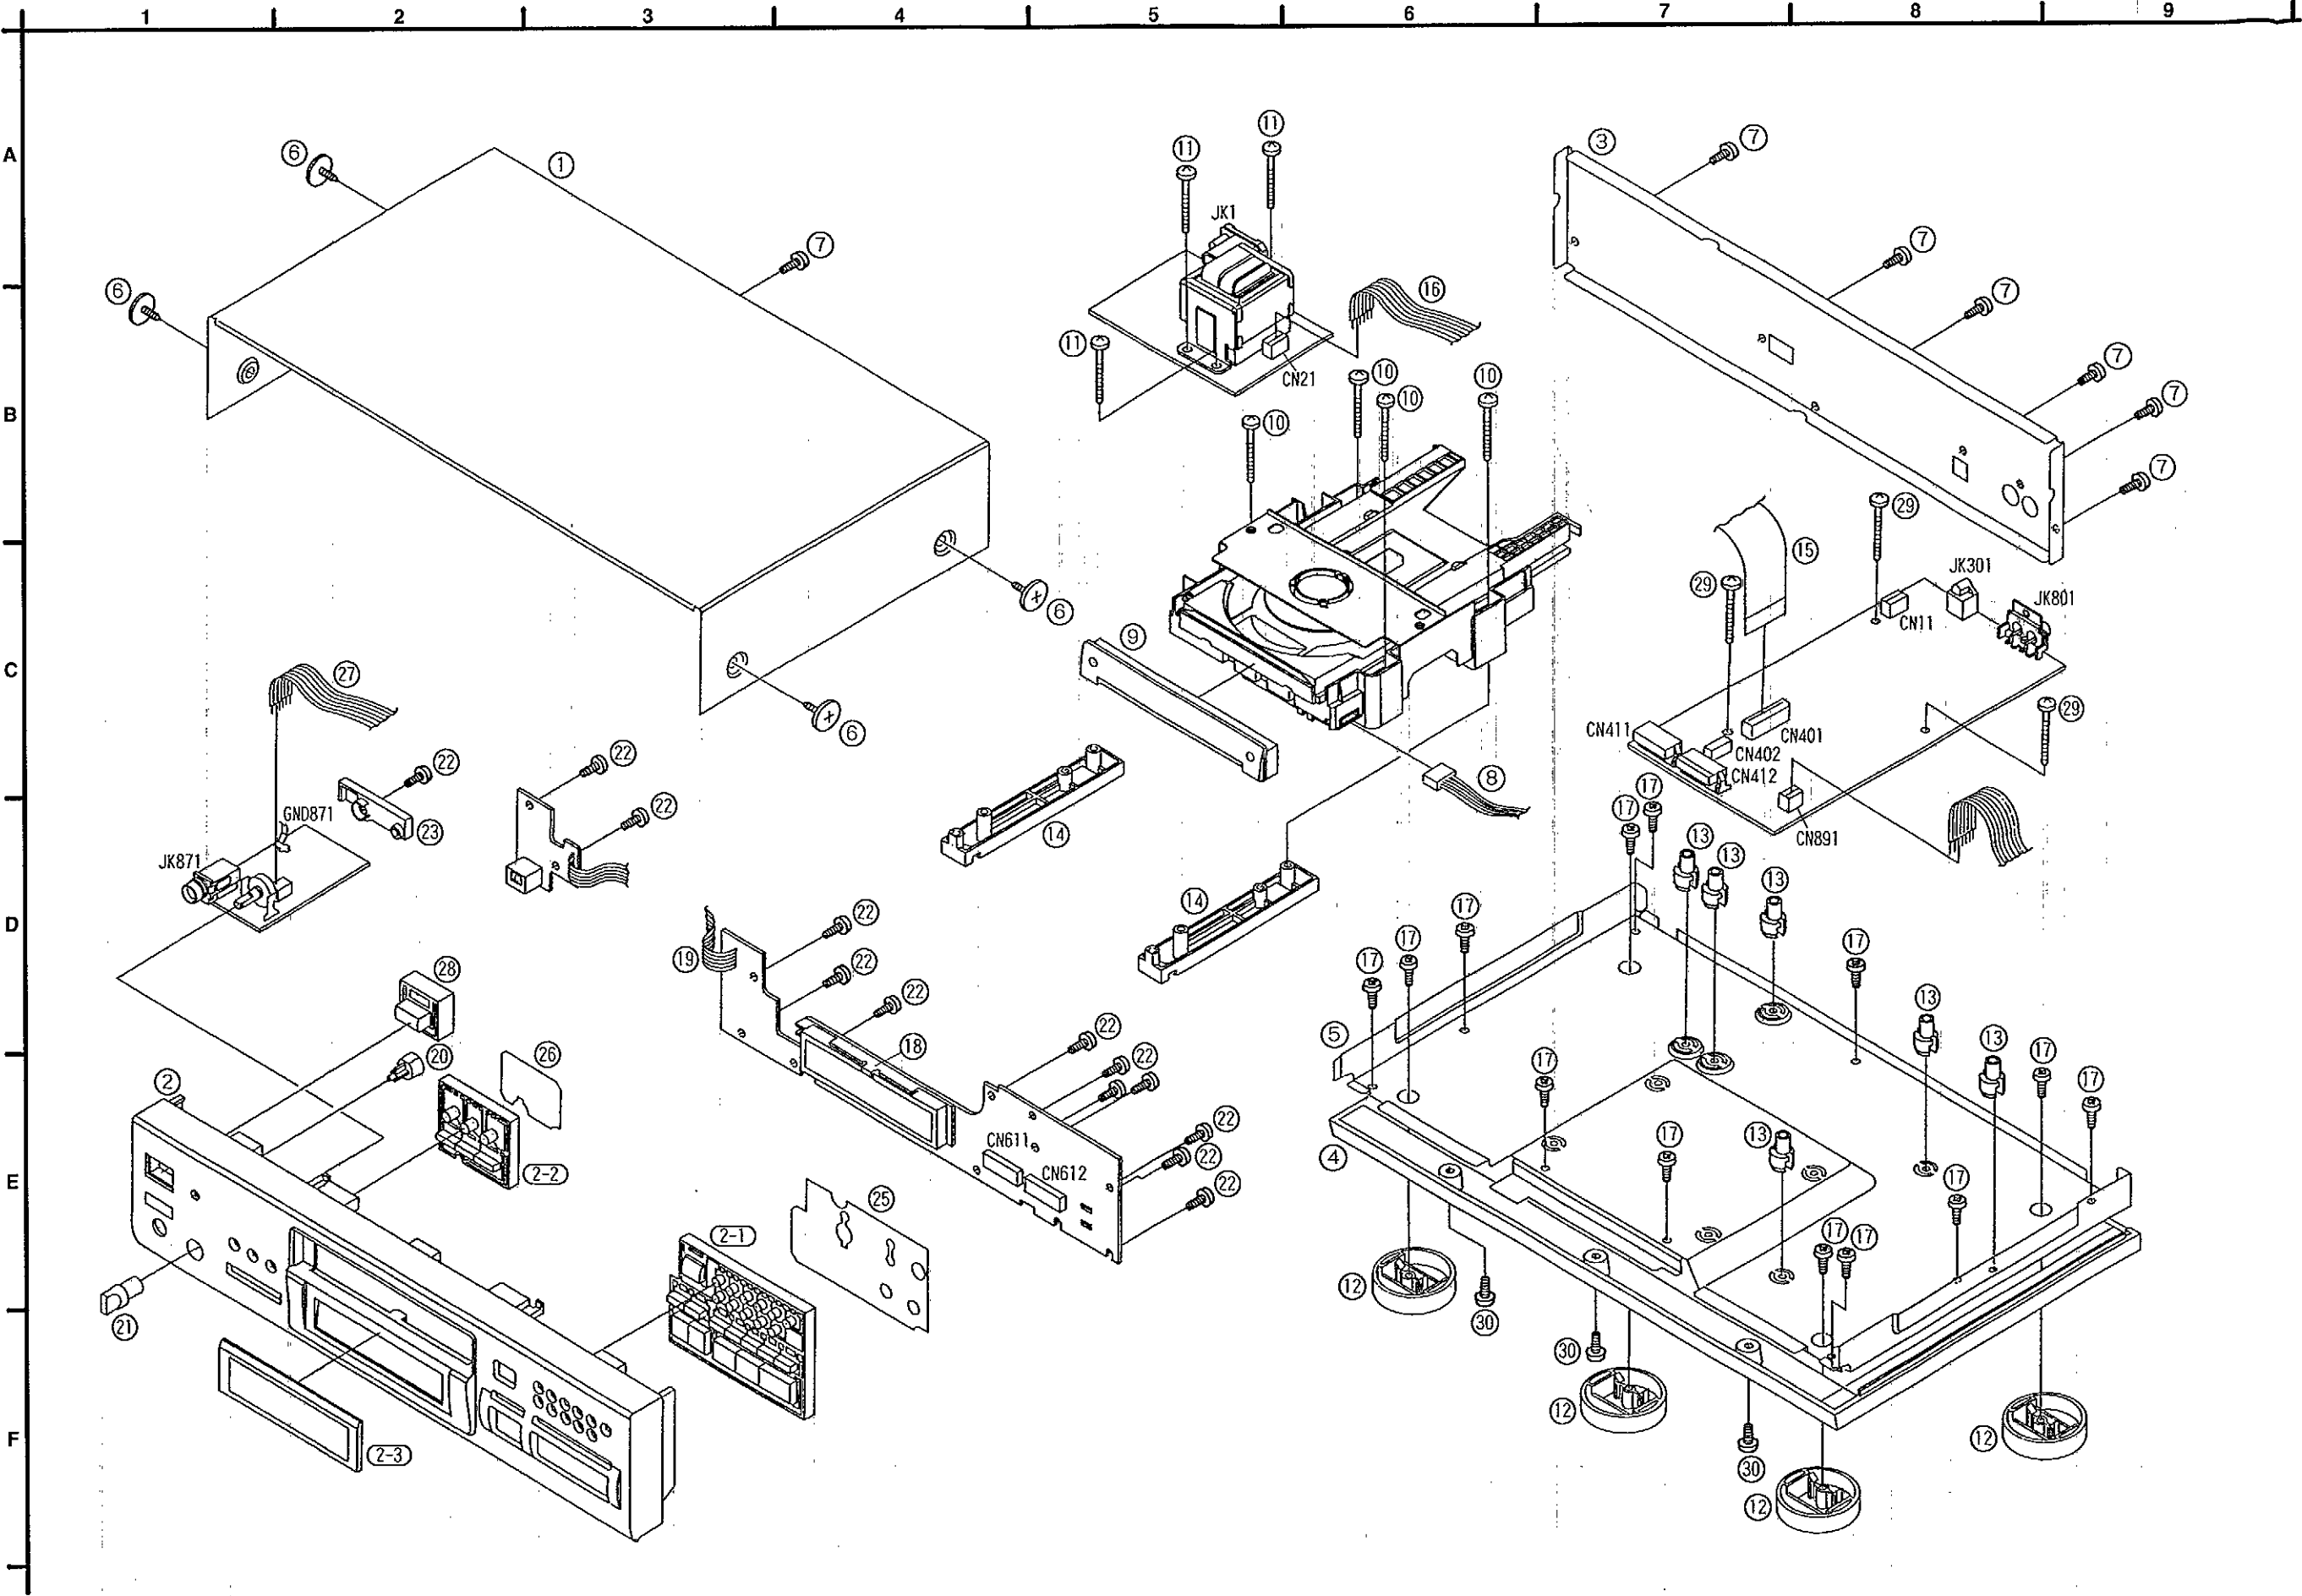

Note:
When changing mechanism parts, apply the specified grease to areas marked "xx" as shown in the drawing.

Ref No.	Part No.
1	RFKXEM30L

Ref. No.	Part No.	Part Name & Description	Remarks
		LOADING UNIT PARTS	
101	RGQ0130-K	TRAY	[MB]
102	RFKJLPG460AE	MECHANISM CHASSIS ASS'Y	[MB]
103	RMRO719-W1	MID. CHASSIS	[MB]
104	RAE1100Z-1	TRAVERSE UNIT	[MB]
105	REX0576	CABLE ASS'Y	[MB]
106	RHD30047	SCREW	[MB]
107	RMG0337-K	DAMPING RUBBER	[MB]
108	RMG0337-Q	DAMPING RUBBER	[MB]
109	RMRO750-W	STOPPER	[MB]
110	XTBS26*8J	SCREW	
111	RDG0142	RELAY GEAR	
112	RDG0259	DRIVE GEAR	[MB]
113	RDP0065	RELAY PULLY	
114	REM0047	MOTOR ASS'Y	[MB]
115	RME0063	LOCK LEVER SPRING	
116	RME0087	ASSIST SPRING	
117	RMG0158	BELT	
118	RMG0338-Q	STOPPER RUBBER	[MB]
119	RMLO177	CHANGE LEVER	
120	RMLO178-1	LOCK LEVER	
121	RMW0112	SLIDE PLATE 1	[MB]
122	RMW0113	SLIDE PLATE 2	[MB]
123	RMRO721-K	GEAR COVER	[MB]
124	RHD20009-1	SCREW	
125	RFKNLPG460AA	DRIVE RACK ASS'Y	[MB]
126	XTB3*8JFZ	SCREW	
127	XYN2*F6FZ	SCREW	
128	RFKNLPG460AB	CLAMP BASE ASS'Y	[MB]
129	RFKNLPG460AC	CLAMPER ASS'Y	[MB]
		ACCESSORIES	
A1	EUR642101	REMOTE CONTROL	[MB]
A1-1	UR64EC1326	BATTERY COVER	[MB]
A2	RJAD043-C	AC MAINS LEAD	△ (E, EG) [MB]
A2	RJAD044-C	AC MAINS LEAD	△ (EB) [MB]
A3	RQT2664-B	INSTRUCTIONS MANUAL	(EB) [MB]
A3	RQT2665-D	INSTRUCTIONS MANUAL	(EG) [MB]
A3	RFKSLPS770AE	INSTRUCTIONS MANUAL	(E) [MB]
A4	SJP2276	STEREO CONNECTION CABLE	
A5	RQA0013	WARRANTY CARD	
A6	RQCB0169	SERVICE CENTER LIST	
		PACKING MATERIALS	
P1	RPQ2276	PACKING CASE	[MB]
P2	RPND842	CUSHION	[MB]
P3	XZB23K35C03	PROTECTION BAG	
P4	SPP730	PROTECTION BAG	

[illegible]

Note: The reference number SA represent the grease and tool used for this unit.

■ Packaging

