



Model Name **WI070 Digital Projector**

Unique selling point **Trade Mark**

- * Full HD
- * 3D Display
- * Vertical Lens Shift Adjustment
- * ISFccc
- * Easy Setup and Maintenance




Projection System	DLP		
Native Resolution	1080p (1920 x 1080)		
Brightness	2000 ANSI Lumen		
Contrast Ratio	10000:1		
Display Color	1.07 Billion Colors		
Lens	F=2.59-2.87, f=16.88-21.88mm		
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)		
Throw Ratio	1.15-1.5 (79"@2M)		
Image Size (Diagonal)	40"-235"		
Zoom Ratio	1.3:1		
Lamp Type	240W		
Lamp(Normal/Economic/SmartEco Mode)*	3500/5000/6000 hours		
Keystone Adjustment	1D, Vertical +/- 20 degrees		
Projection Offset / Lens Shift	Vertical 110%-130%±5%		
Resolution Support	up to WUXGA		
Horizontal Frequency	15K-102KHz		
Vertical Scan Rate	23-120Hz		
Compatibility	SDTV, EDTV, HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p	
	Video Compatibility	NTSC, PAL, SECAM	
Interface	Computer in (D-sub 15pin)	x 1	
	HDMI	x 2	
	Composite Video in (RCA)	x 1	
	S-Video in (Mini DIN 4pin)	x 1	
	Component Video in	x 1	
	Audio in (Mini Jack)	x 1	
	Audio L/R in (RCA)	x 1	
	Audio out (Mini Jack)	x 1	
	Speaker	10W x 1	
	USB (Type B)	x1 (for service)	
	RS232 (DB-9pin)	x 1	
	DC 12V Trigger	x 1	
Dimensions	Dimensions(W x H x D)	312 x 109 x 244 mm	
	Weight	2.65KG	
Power	Power Supply	AC 100 to 240 V, 50 to 60 Hz	
	Power Consumption	353W/110V (typical), Standby < 0.5W	
Audible Noise	33/30 dBA (Normal/Economic mode)		
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)		
Preset Modes	Dynamic / Standard / Cinema / 3D / User 1 / User 2 / User 3		
Accessories	Standard	Optional	
	Remote Control w/ Battery	Spare Lamp Kit	P/N: 5J.5J.J7L05.001
	Power Cord (by region)	Ceiling Mount	P/N: 5J.J2K01.001
	User Manual CD	3D Glasses	P/N: 5J.J7K25.011
	Quick Start Guide	Carry Bag	P/N: 5J.J3T09.001
	Warranty Card (by region)		
	VGA (D-sub 15pin) Cable		

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

WI070 Digital Projector


Distance Chart

Floor Installation

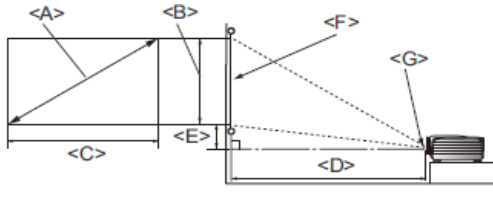

<F>: Screen <G>: Center of lens

Ceiling Installation

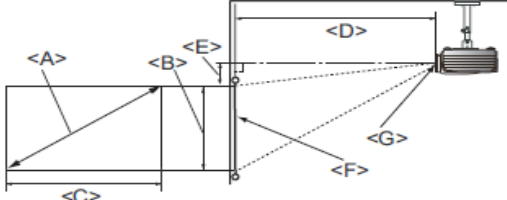

<F>: Screen <G>: Center of lens


■ The screen aspect ratio is 16:9 and the projected picture is 16:9

Diagonal <A> [inch (mm)]	Height [mm]	Width <C> [mm]	Projection distance <D> [mm]			Lowest/Highest lens position <E> [mm]
			Min distance (with max zoom)	Average	Max distance (with min zoom)	
40 (1016)	498	886	1013	1165	1316	25
50 (1270)	623	1107	1266	1456	1646	31
60 (1524)	747	1328	1519	1747	1975	37
70 (1778)	872	1550	1772	2038	2304	44
80 (2032)	996	1771	2025	2329	2633	50
90 (2286)	1121	1992	2278	2620	2962	56
100 (2540)	1245	2214	2532	2911	3291	62
110 (2794)	1370	2435	2785	3203	3620	68
120 (3048)	1494	2657	3038	3494	3949	75
130 (3302)	1619	2878	3291	3785	4278	81
140 (3556)	1743	3099	3544	4076	4608	87
150 (3810)	1868	3321	3797	4367	4937	93
160 (4064)	1992	3542	4051	4658	5266	100
170 (4318)	2117	3763	4304	4949	5595	106
180 (4572)	2241	3985	4557	5241	5924	112
190 (4826)	2366	4206	4810	5532	6253	118
200 (5080)	2491	4428	5063	5823	6582	125
235 (5969)	2926	5202	5949	6842	7734	146

Wall mount/Ceiling mount Chart

◎ Ceiling mount screws:
M4 (Max L = 25 mm;
Min L = 20 mm)

Unit: mm

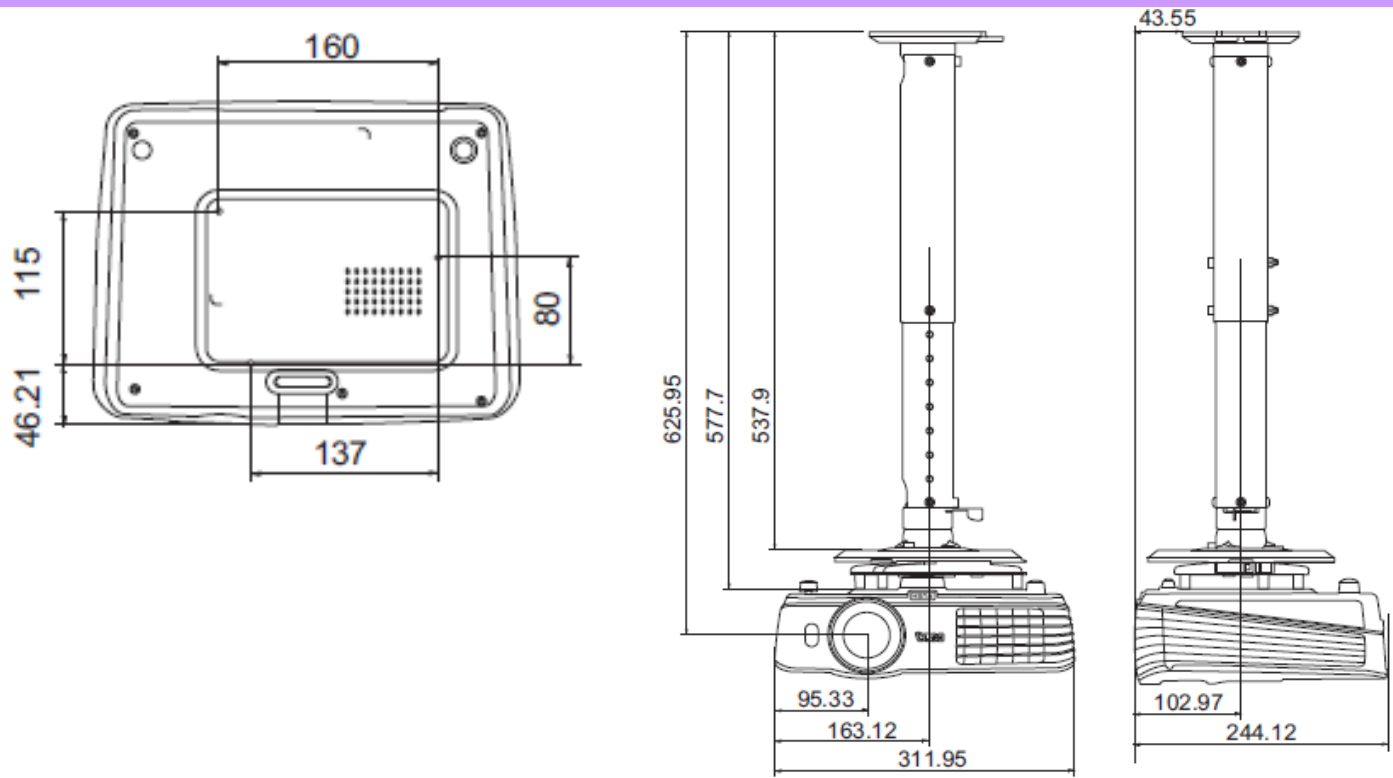

Dimension

