


Teensy 4.0




Welcome to Teensy® 4.0
 32 Bit Arduino-Compatible Microcontroller

To begin using Teensy, please visit the website & click [Getting Started](#).
www.pjrc.com/teensy

Digital Pins digitalRead digitalWrite pinMode	Red LED Loading Status dim: Ready bright: Writing blink: No USB	PWM PWM PWM PWM PWM PWM PWM PWM
Analog Pins analogRead	CRX1 CTX1	LRCLK1 LRCLK1
PWM Pins analogWrite	TX5 TX5	TX4 TX4 TX3 TX3
Digital Audio Audio Library	SDA0 SDA1 SCL0 SCL1	SPDIF IN SPDIF OUT CRX1
Serial Ports Serial1 - Serial7	TX2 TX2	TX1 TX1
I²C Port Wire Library	TX2 TX2	TX1 TX1
SPI Port SPI Library	TX2 TX2	TX1 TX1
CAN Bus FlexCAN_14 Library	TX2 TX2	TX1 TX1

On/Off Program
 GND
 3.3V
 VBat

All digital pins have 100nF capacitor

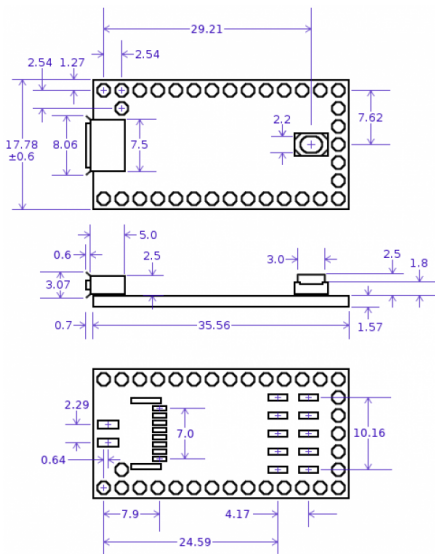

Article extrait de : <https://lesporteslogiques.net/wiki/> - **WIKI Les Portes Logiques**
Adresse : <https://lesporteslogiques.net/wiki/materiel/teensy-4?rev=1746193207>
Article mis à jour: **2025/05/02 15:40**